

LED, base BA15d, red, 230 V AC, accessory for signaling columns, with diameter 50 mm and 70 mm



Figure similar

product brand name		SIRIUS		
product designation		LED		
General technical data				
type of voltage of the operating voltage		AC		
operating voltage				
• 1 at AC at 50 Hz rated value				230 V
• 1 at AC at 60 Hz rated value				230 V
relative positive tolerance of the operating voltage		10 %		
relative negative tolerance of the operating voltage		-15 %		
reference code according to EN 61346-2		P		
Lamp				
type of light source		LED		
light intensity		1.44 cd		
design of the reflection body		Drum lens		
socket design		BA 15d		
Enclosure				
height		45 mm		
width		20 mm		
outer diameter of the signal column element		70 mm		
color		red		
Ambient conditions				
ambient temperature during operation		-20 ... +60 °C		
Environmental footprint				
Environmental Product Declaration(EPD)		Yes		
Siemens eco profile (SEP)		Siemens EcoTech		
Approvals Certificates				
General Product Approval		other		



[Confirmation](#)



[Confirmation](#)



Environment



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4458-6XB>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4458-6XB>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD4458-6XB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4458-6XB&lang=en

-P

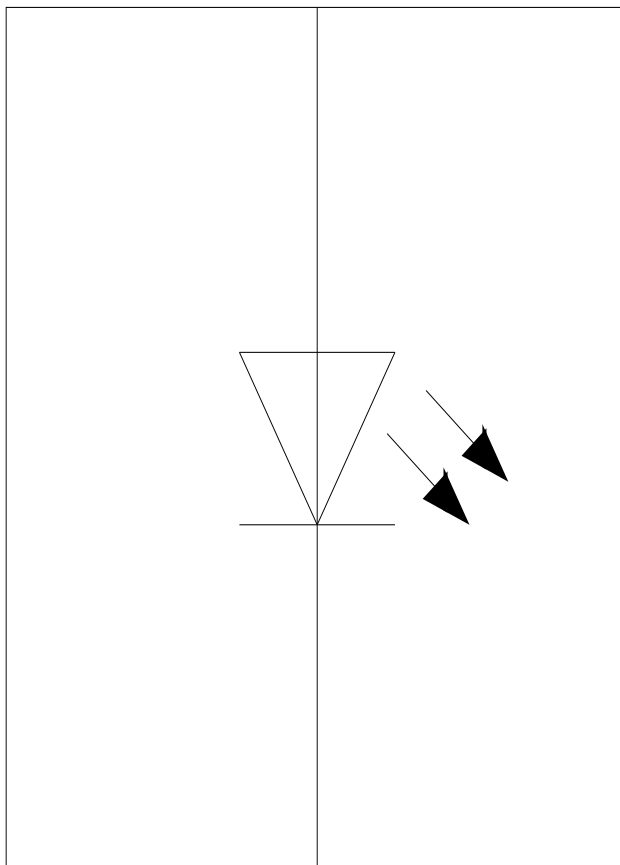

last modified:

10/2/2026