



Fixing/reject bracket for plug-in relay RT series and PT screw terminal base not logical

|                                              |                          |                |
|----------------------------------------------|--------------------------|----------------|
| product brand name                           |                          | SIRIUS         |
| product type designation                     |                          | LZS            |
| General technical data                       |                          |                |
| display version LED                          |                          | No             |
| reference code according to IEC 81346-2      |                          | U              |
| Substance Prohibittance (day/month/year)     |                          | 05/01/2012     |
| Net Weight                                   |                          | 0.004 kg       |
| Mechanical data                              |                          |                |
| product component plug-in socket             |                          | No             |
| Auxiliary circuit                            |                          |                |
| number of NC contacts for auxiliary contacts |                          | 0              |
| number of NO contacts for auxiliary contacts |                          | 0              |
| number of CO contacts for auxiliary contacts |                          | 0              |
| Connections/ Terminals                       |                          |                |
| product function removable terminal          |                          | No             |
| Installation/ mounting/ dimensions           |                          |                |
| mounting position                            |                          | any            |
| height                                       |                          | 24 mm          |
| width                                        |                          | 27 mm          |
| depth                                        |                          | 55 mm          |
| Ambient conditions                           |                          |                |
| ambient temperature                          |                          |                |
| • during storage                             |                          | -25 ... +70 °C |
| • during transport                           |                          | -25 ... +70 °C |
| Approvals Certificates                       |                          |                |
| Environment                                  | General Product Approval | other          |

[Environmental Con-  
firmations](#)



[Confirmation](#)



### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information for data generation and storage  
<https://support.industry.siemens.com/cs/ww/en/view/109995012>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>  
 Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:PT17024>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:PT17024>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT17024>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=LZS:PT17024&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=LZS:PT17024&lang=en)

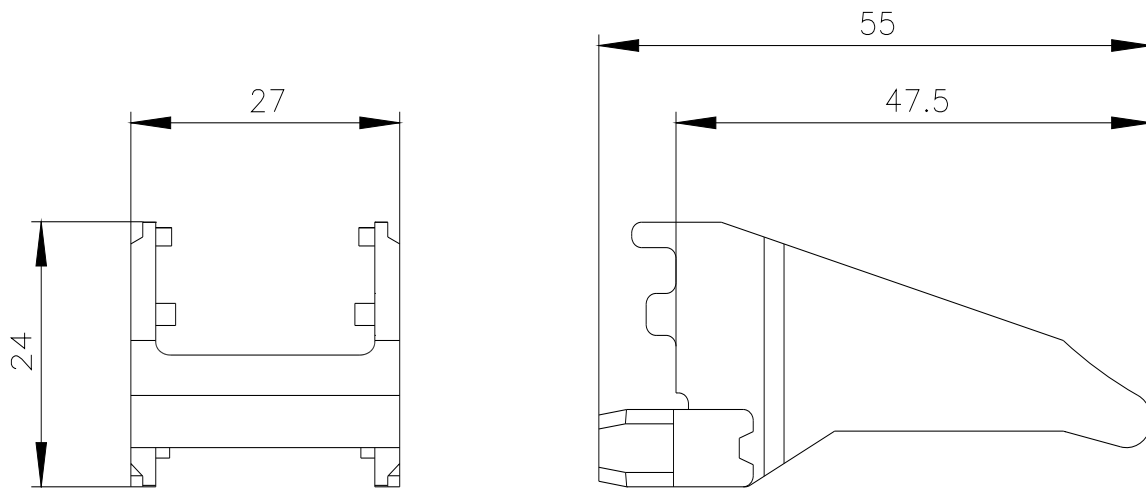

last modified:

10/22/2025 