


## Transfer Switch Accessories

**KOHLER** Power Systems

RXT Status Indicator Kit

**ISO 9001**  
KOHLER  
POWER SYSTEMS  
NATIONALLY REGISTERED

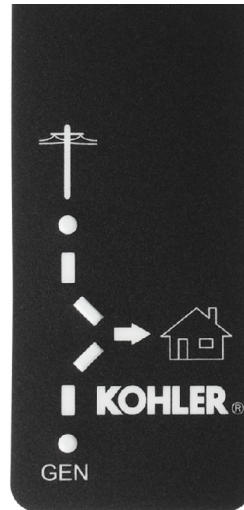

(Enlarged to show detail)

GM84662-KP1-QS

### Applicable Models

- RXT Automatic Transfer Switch

### Description

Status Indicator Kit GM84662-KP1-QS provides LEDs to indicate transfer switch status, including the following:

- Source Available:
  - Utility power (normal)
  - Generator (emergency)
- Transfer Switch Position:
  - Utility (utility power supplying the load)
  - Generator (standby generator supplying the load)

The status indicator kit is designed only for the Kohler Model RXT automatic transfer switch. It will not connect to or operate with any other ATS. The Model RXT transfer switch must be connected to a Kohler generator set equipped with the RDC2 or DC2 controller for proper indicator LED operation.

The indicator panel mounts on the outside of the transfer switch for clear visibility. The status indicator kit can be used on transfer switches installed indoors or outdoors. An overhang on the enclosure protects the indicator panel and ribbon cable opening.

LED Operation

LED	Color	Operation
Utility available	Green	Lights to indicate that the utility source voltage and frequency are acceptable.
Utility connected	Green	Lights to indicate that the utility source is connected and providing power to the building.
Generator connected	Red	Lights to indicate that the generator is connected and providing power to the building.
Generator power available	Red	Lights to indicate that the generator voltage and frequency are acceptable.


Dimensions

Item	Dimensions, mm (in.)
Indicator panel	92 x 42 (3.62 x 1.65)
Ribbon cable length	254 (10)

Kit Contents

Kit	GM84662-KP1-QS
Description	Qty.
Decal, Membrane Status Indicator	1
Installation Instructions	1

Status Indicator Location and Connection

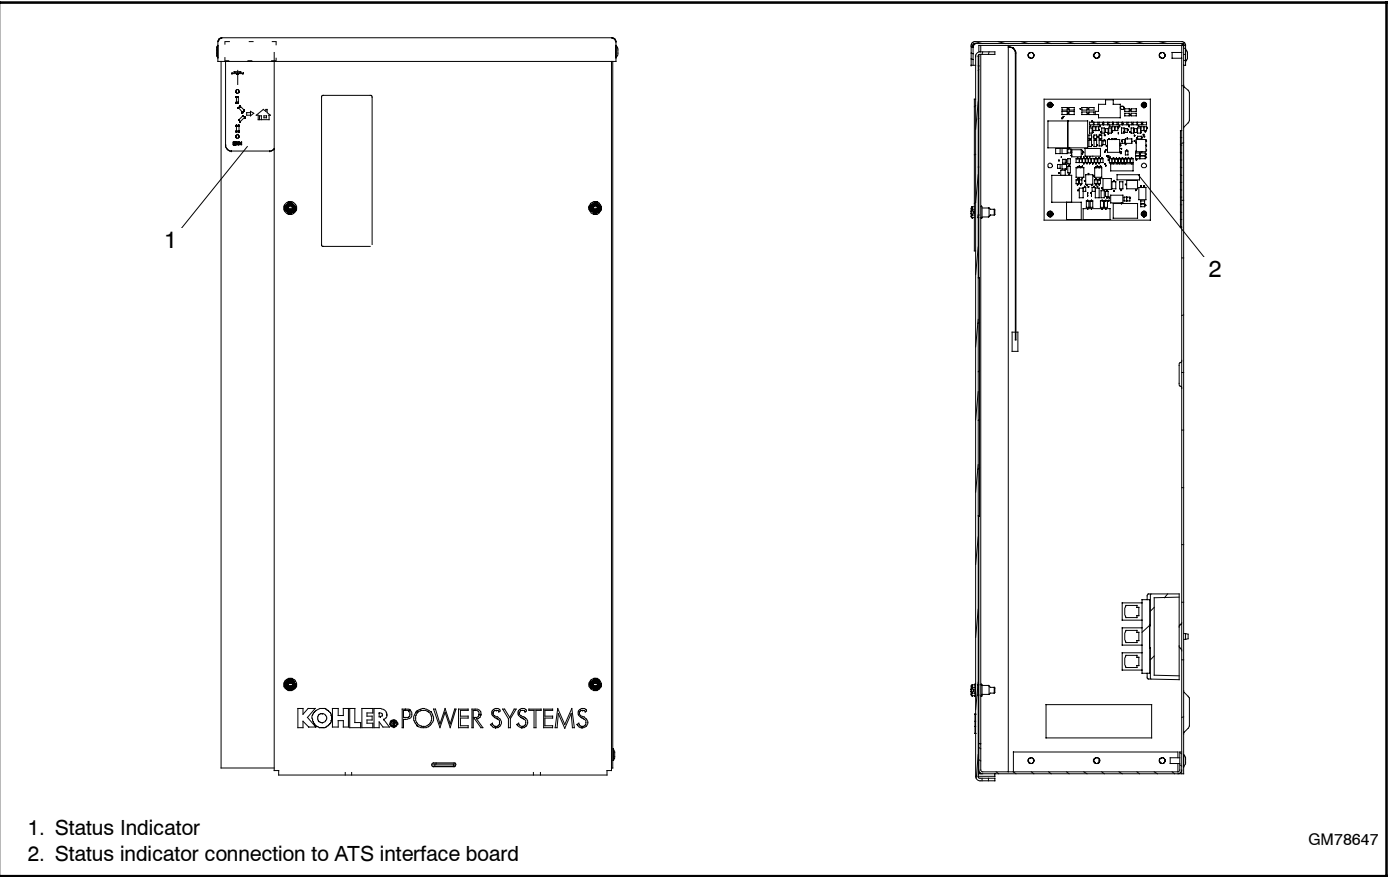

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator distributor for availability.

DISTRIBUTED BY: