

LED+ Pro Max Dimmers

Handle the Surprises. No Extra Trips.

Keep Lutron Pro Max dimmers on the truck for maximum power and versatility with LED, ELV, MLV, and INC/HAL lighting loads.

NEW



DV-PRO-WH
Diva dimmer – LED+
Pro Max model



MA-PRO-WH
Maestro dimmer – LED+
Pro Max model



ST-PRO-N-WH
Sunnata dimmer – LED+
Pro Max model

Model	DV-PRO-XX	MA-PRO-XX	ST-PRO-N-XX
Description	Diva dimmer – LED+ Pro Max model	Maestro dimmer – LED+ Pro Max model	Sunnata dimmer – LED+ Pro Max model
Rating/Load Type	Phase selectable – 250W LED, 500W ELV, 400VA MLV, 500W INC/HAL	Phase selectable – 250W LED, 500W ELV, 400VA MLV, 500W INC/HAL	Phase selectable – 250W LED, 500W ELV, 400VA MLV, 500W INC/HAL
Neutral Required	No (neutral required for MLV/ELV lights)	No (neutral required for MLV/ELV lights)	Yes
3-way/Multi-location Options	Accessory switch ST-AS-XX (gloss) for 3-way/multi-location, or any traditional mechanical switch for 3-way only	Companion dimmer only MA-R-XX (gloss) MSC-AD-XX (satin)	Companion dimmer only ST-RD-XX (gloss & satin)
Maximum Number of Companions	9	9	4
Identical Companion Appearance	No	No	Yes
Identical Companion Functionality	No. (Press top once for preset slider level, double press top for full on; press bottom once for off or press and hold for delayed fade to off.)	Yes. (Tap once for preset; double tap for full on; press & hold for delayed fade-to-off; adjust light level with rocker.)	Yes. (Tap once for preset; double tap for full on; press & hold for delayed fade-to-off; slide to adjust light level.)
Interchangeable Tap Switch	No	Yes	No

*For dimming LED loads in MLV/ELV fixtures, see Lutron App Note #599

Still have questions? Call Lutron's 24/7 technical support at 1-844-LUTRON1.

Features and Wiring

DV-PRO-WH


Diva dimmer – LED+ Pro Max model

- Switching from up to 10 locations
- Most popular dimmer style: matches traditional paddle switches or other Diva dimmers
- No neutral required for LED and Incandescent lights



Scan for installation

*Use with Accessory Switch ST-AS for switching from 2 or more locations. Also works with a standard 3-way switch when controlling from only 2 locations.

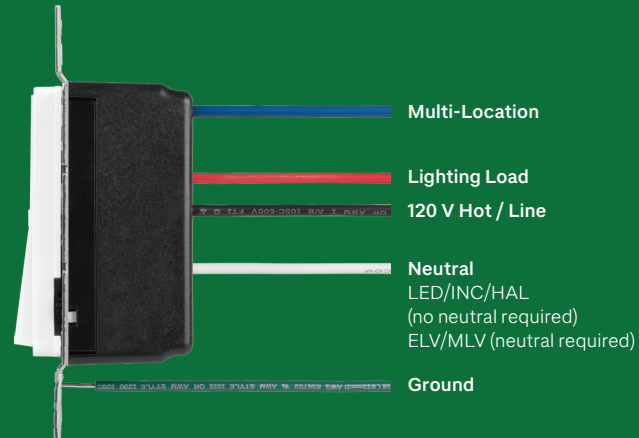

MA-PRO-WH

Maestro dimmer – LED+ Pro Max model

- Dimming from up to 10 locations
- Interchangeable tap switch: allows for a color swap without having to remove the dimmer and rewire a new one
- No neutral required for LED and Incandescent lights



Scan for installation

*Use with Companion Dimmers MA-R/MSC-AD for dimming from 2 or more locations.



ST-PRO-N-WH


Sunnata dimmer – LED+ Pro Max model

- Dimming from up to 5 locations
- Touch light bar: Turn on/off or raise/lower lights with a swipe of a finger
- Neutral required



Scan for installation

*Use with Companion Dimmer ST-RD for dimming from 2 or more locations.

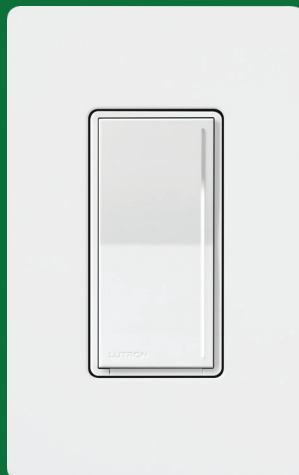

Pro Max is Your One-Stop Shop



Pro Max dimmers simplify your projects with one dependable solution for almost any lighting challenge. Unmatched reliability and performance to help you get the job done.

The Gold Standard in Dimmers. No Flicker. No Buzz. No Compromise.



PHASE SELECTABLE

Use with forward or reverse phase dimming



LED 250 W | INC/HAL 500

Dimmable LED bulbs and downlights



ELV 500 W

Tape light for under cabinet and toe kick



MLV 400 VA

Track lights and fixtures for accent lighting



10-year warranty*

*With product registration.
5-year warranty without registration.





Colors

Gloss Finishes

	DV-PRO-XX	MA-PRO-XX	ST-PRO-N-XX
Almond (AL)	•	•	
Black (BL)	•	•	•
Brown (BR)	•	•	
Gray (GR)	•	•	
Ivory (IV)	•	•	•
Light Almond (LA)	•	•	•
White (WH)	•	•	•

Satin Finishes

Whites

	DV-PRO-XX	MA-PRO-XX	ST-PRO-N-XX
Brilliant White (BW)			•
Glacier White (GL)			•
Snow White (SW)		•	•
Architectural White (RW)			•

Grays

Lunar Gray (LG)			•
Mist (MI) [†]		•	•
Pebble (PB)			•
Cobblestone (CS)			•
Slate (SL)			•

Neutrals

Biscuit (BI)		•	•
Sand (SD)			•
Taupe (TP)		•	•
Pumice (PM)			•
Clay (CY)			•
Sage (SA)			•

Accents

Espresso (EP)			•
Truffle (TF)			•
Deep Sea (DE)			•
Midnight (MN)		•	•
Signal Red (SR) ^{††}		•	•

[†]For Maestro, Mist is called Palladium (PD), ^{††}For Maestro, Signal Red is called Hot (HT)