


C-M08M04-04X025PV10,0-ES-088843 (Order no. 088843)**Connecting cable with plug connector M8, 4-pin, 10 m**

- ▶ Male plug M8, 4-pin
- ▶ Straight plug connector
- ▶ PVC cable
- ▶ Cable length 10 m
- ▶ With flying lead



Dimensional drawings

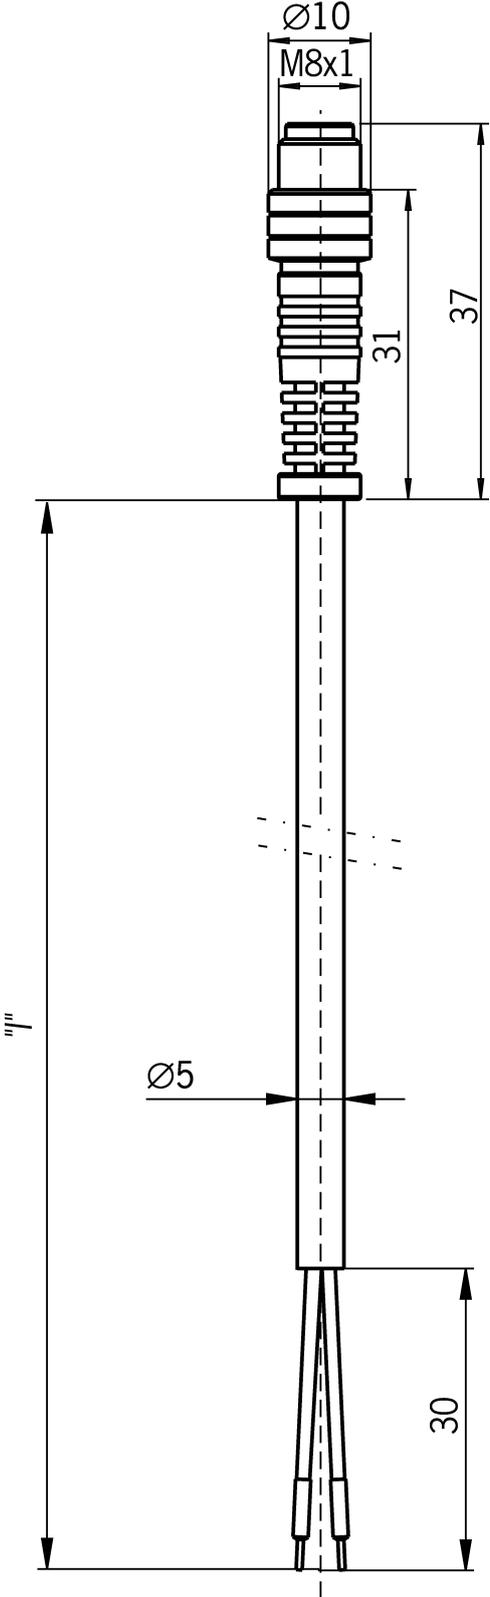

Technical data

Electrical connection values

Rated voltage	30 V
---------------	------

Mechanical values and environment

Conductor identification	Color code
Conductor cross-section	0.25 mm ²
Number of conductors	4
Tightening torque	0.4 Nm
Dynamic bending radius	10 x cable diameter
Static bending radius	5 x cable diameter
Storage temperature	-25 ... 70 °C
Cable type	straight
Cable diameter	
	approx. 4.5 mm
Cable length	10 m
Sheath color	black
Drag chain suitability	No
Cable ambient temperature (dynamic)	-5 ... 70 °C
Cable ambient temperature (static)	-25 ... 70 °C
Material	
	Sheath PVC

Connection 2

Conductor end	Cable end sleeve
Connection type	flying lead

Connection 1

Connection type	Plug connector M8x1
Connection type	Male plug
Cable outlet	straight
Number of pins	4
Degree of protection	IP67 (in the inserted state)