


121700R Multi-Conductor - Category 5e DataTuff® Twisted Pair Cable

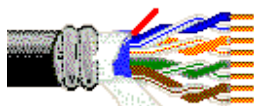

For more Information
please call

1-800-Belden1

**Description:**

24 AWG Bonded-Pairs solid bare copper conductors, polyolefin insulation, PVC inner jacket, rip cord, polyester wrap, aluminum interlocked armor, industrial grade outer PVC jacket. Sequential marking at one meter intervals.

Usage (Overall)**Suitable Applications:**

Industrial Ethernet Cable, Harsh Environments, 350MHz Enhanced Category 5e, Gigabit Ethernet, 100BaseTX, 100BaseVG ANYLAN, 155ATM, 622ATM, NTSC/PAL Component or Composite Video, AES/EBU Digital Audio, AES51, RS-422, RJ-45 Compatible, Flexible Applications, Armored for Extra Protection

Physical Characteristics (Overall)**Conductor****AWG:**

# Pairs	AWG	Stranding	Conductor Material	Dia. (in.)
4	24	Solid	BC - Bare Copper	.020

Insulation**Insulation Material:**

Insulation Material	Wall Thickness (in.)	Dia. (in.)
PO - Polyolefin	.009	.035

Inner Jacket**Inner Jacket Material:**

Inner Jacket Material	Nom. Dia. (in.)
PVC - Polyvinyl Chloride	.200

Inner Jacket Ripcord:

Yes

Outer Shield**Outer Shield Material:**

Outer Shield Material
Unshielded

Outer Jacket**Outer Jacket Material:**

Outer Jacket Material	Nom. Wall Thickness (in.)
Industrial Grade PVC - Polyvinyl Chloride	.045

Outer Jacket over Armor**Outer Jacket Material over Armor (y/n):**

Yes

Outer Jacket Material Over Armor:

OJ Over Armor Material
PVC - Polyvinyl Chloride

Armor**Armor Type:**

Interlocked

Armor Material:

Aluminum

Diameter over Armor:

.440

Overall Cabling

121700R Multi-Conductor - Category 5e DataTuff® Twisted Pair Cable

Overall Cabling Separator Material: Polyester

Overall Nominal Diameter: 0.530 in.

Pair**Pair Color Code Chart:**

Number	Color
1	White/Blue Stripe & Blue
2	White/Orange Stripe & Orange
3	White/Green Stripe & Green
4	White/Brown Stripe & Brown

Mechanical Characteristics (Overall)

Installation Temperature Range: -25°C To +75°C

Operating Temperature Range: -40°C To +75°C

Bulk Cable Weight: 102 lbs/1000 ft.

Max. Recommended Pulling Tension: 40 lbs.

Min. Bend Radius (Install)/Minor Axis: 6.500 in.

Applicable Specifications and Agency Compliance (Overall)**Applicable Standards & Environmental Programs**

NEC/(UL) Specification: CM, UL444

CEC/C(UL) Specification: CMG, HL

Other Standards: 11801 Category 5

EU Directive 2000/53/EC (ELV): Yes

EU Directive 2002/95/EC (RoHS): Yes

EU RoHS Compliance Date (mm/dd/yyyy): 10/01/2005

EU Directive 2002/96/EC (WEEE): Yes

EU Directive 2003/11/EC (BFR): Yes

CA Prop 65 (CJ for Wire & Cable): Yes

MII Order #39 (China RoHS): Yes

Other Specification: NEMA WC-63.1 Category 5e

Flame Test

UL Flame Test: UL1685 UL Loading

CSA Flame Test: FT4

Suitability

Sunlight Resistance: Yes

Oil Resistance: Yes

Plenum/Non-Plenum

Plenum (Y/N): No

Electrical Characteristics (Overall)**Nom. Mutual Capacitance:**

Capacitance (pF/ft)
15

Nominal Velocity of Propagation:

VP (%)
70

Maximum Capacitance Unbalance (pF/100 m): 66

Maximum Delay:

121700R Multi-Conductor - Category 5e DataTuff® Twisted Pair Cable

Delay (ns/100 m)

510

Max. Delay Skew:

Delay Skew (ns/100 m)

25

Maximum Conductor DC Resistance:

DCR @ 20°C (Ohm/100 m)

9

Max. Operating Voltage - UL:

Voltage

300 V RMS

Maximum DCR Unbalanced:

DCR Unbalance @ 20°C (%)

3

Electrical Characteristics-Premise (Overall)

Premise Cable Electrical Table 1:

Freq. (MHz)	Max. Attenuation (dB/100 m)	Min. NEXT (dB)	Min. PSNEXT (dB)	Min. ACR (dB)	Min. PSACR (dB)	Min RL (dB)
1	2.0	65.3	65.3	63.3	63.3	20.0
4	4.0	56.3	56.3	52.3	52.3	23.0
8	5.7	51.8	51.8	46.1	46.1	24.5
10	6.4	50.3	50.3	43.9	43.9	25.0
16	8.1	47.3	47.3	39.1	39.1	25.0
20	9.2	45.8	45.8	35.2	35.2	25.0
25	10.3	44.3	44.3	34.1	34.1	24.3
31.25	11.6	42.9	42.9	31.3	31.3	23.6
62.5	16.8	38.4	38.4	21.6	21.6	21.5
100	21.7	35.3	35.3	17.1	17.1	20.1
155	27.7	32.5	32.5	4.7	4.7	19.0
200	32.0	30.8	30.8	3.0	3.0	19.0
250	36.4	29.3	29.3	>0	>0	18.0
300	40.5	28.2	28.2	>0	>0	18.0
310	41.3	27.9	27.9			18.0
350	44.3	27.2	27.2			17.0

Premise Cable Electrical Table 2:

Freq. (MHz)	Input (Unfitted) Imp. (Ohms)	Fitted Impedance	Min. ELFEXT (dB)	Min. PSELFEXT (dB)
1	100 ± 12	105 ± 10	63.8	60.8
4	100 ± 12	100 ± 10	51.7	48.7
8	100 ± 12	100 ± 10	45.7	42.7
10	100 ± 12	100 ± 10	43.8	40.8
16	100 ± 12	100 ± 10	39.7	36.7
20	100 ± 12	100 ± 10	37.7	34.7
25	100 ± 15	100 ± 10	35.8	32.8
31.25	100 ± 15	100 ± 10	33.9	30.9
62.5	100 ± 15	100 ± 10	27.8	24.8
100	100 ± 15	100 ± 10	23.8	20.8
155	100 ± 18	100 ± 10	19.9	16.9
200	100 ± 20	100 ± 10	17.7	14.7
250	100 ± 20	100 ± 10	15.8	12.8
300	100 ± 20	100 ± 10	14.2	11.2
310	100 ± 20	100 ± 10	13.9	10.9
350	100 ± 22	100 ± 10	12.9	9.9

Notes (Overall)

Notes: US Patent #'s 5, 606, 151; 5, 734, 126 Operating temperatures are subject to length de-rating. Cable passes -40C Cold Bend per UL 1581. Cable passes -40C cold impact.

121700R Multi-Conductor - Category 5e DataTuff® Twisted Pair Cable

Put Ups and Colors:

Item #	Putup	Ship Weight	Color	Notes	Item Desc
121700R J221000	1,000 FT	112.000 LB	BLUE, STRONG		1700R ALUM ARMOR PVC - Special
121700R J223000	1,000 FT	122.000 LB	BLUE, STRONG		1700R ALUM ARMOR PVC
121700R J225000	5,000 FT	595.000 LB	BLUE, STRONG		1700R ALUM ARMOR PVC
121700R 0021000	1,000 FT	112.000 LB	RED		1700R ALUM ARMOR PVC - SPECIAL
121700R 0103000	3,000 FT	366.000 LB	BLACK		1700R ALUM ARMOR PVC

Revision Number: 9 Revision Date: 11-04-2008

© 2008 Belden, Inc
 All Rights Reserved.


Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.


Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with EU RoHS (Directive 2002/95/EC, 27-Jan-2003). Material manufactured prior to the compliance date may be in stock at Belden facilities and in our Distributor's inventory. The information provided in this Product Disclosure, and the identification of materials listed as reportable or restricted within the Product Disclosure, is correct to the best of Belden's knowledge, information, and belief at the date of its publication. The information provided in this Product Disclosure is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. This Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.

BELDEN

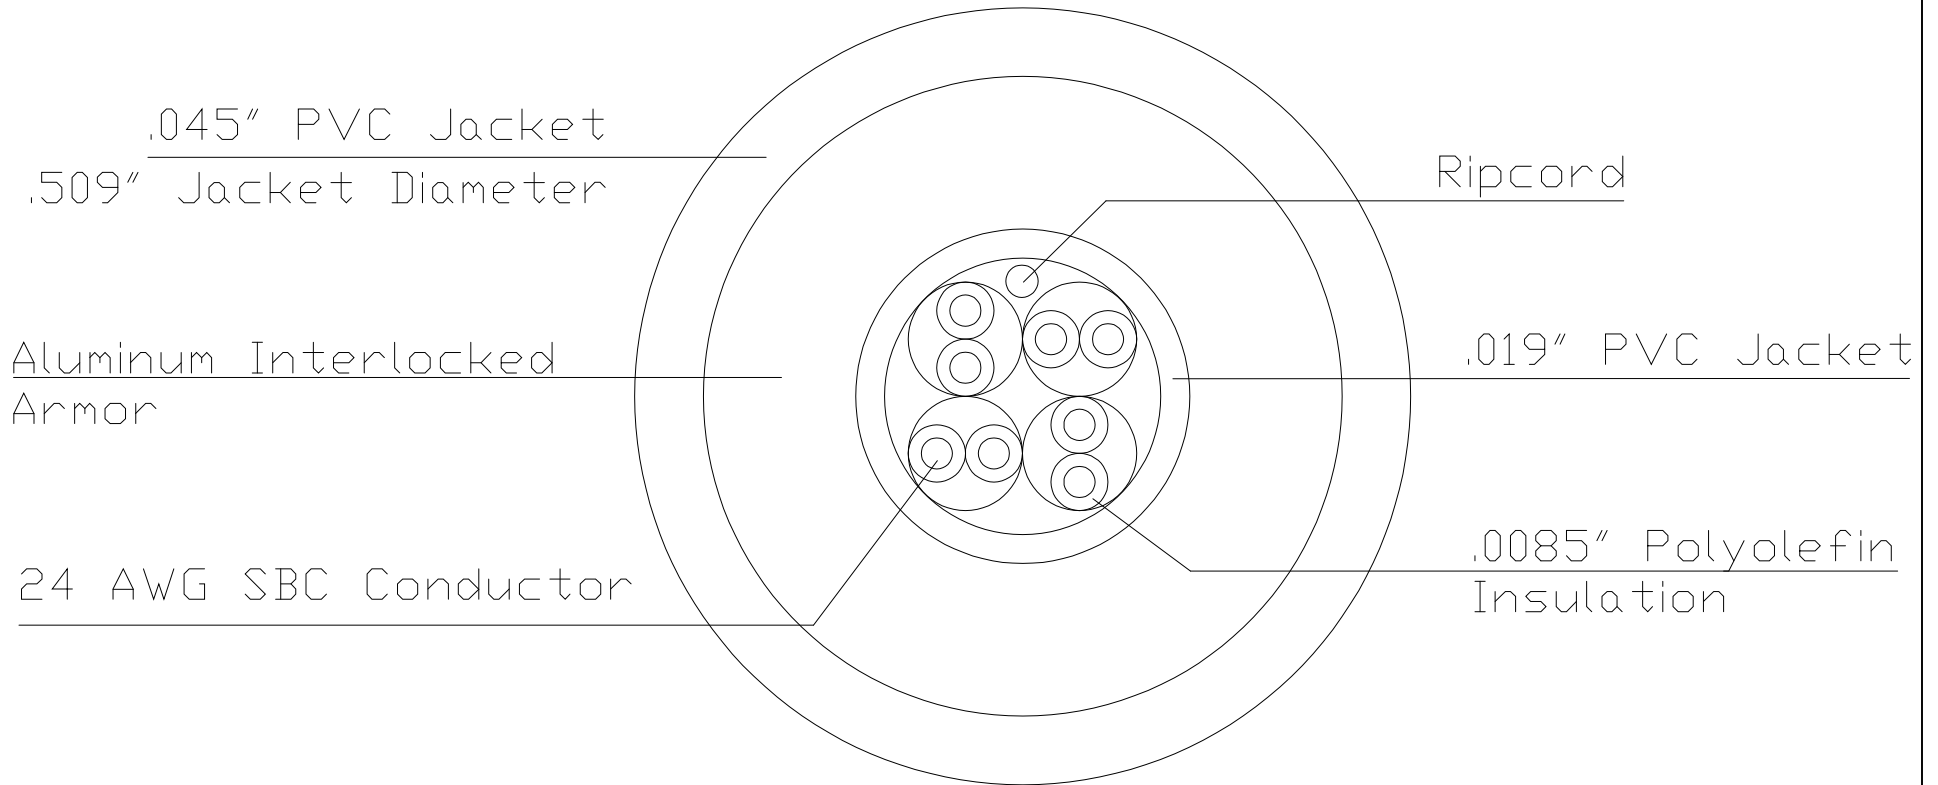

Let.	Was	Date	Belden Electronics Division Proprietary Information	NOTE:	Belden 121700RQ788707 Item 3		
E			This drawing and specification is the property of Belden and shall not be reproduced, copied or divulged in whole, or in part as the basis for manufacture or sale of the item or items disclosed.	Unless Otherwise Specified Decimal Dimensions are: ± 0.003 in Fractional Dimensions are: ± 1/ 64 in Angles are: ± 1/4°		Drawn By: Jason Kovaric Checked: Date: 12/07/07	Sheet No. 1 of 1
D							Machine Dwg No.
C							
B							
A							