




MARCUS

Marcus Transformer LTD
 Phone: 1-800-267-7376
 Fax: 1-866-205-7526
 Email: Info@marcustransformer.com

TECHNICAL DATA

SINGLE PHASE CONTROL TRANSFORMER


DESCRIPTION	
MODEL	MO50H
Type	Open
VA	50
Primary (Volts)	347 / 380
Secondary (Volts)	120 / 240
Input / Output Amps	0.14 , 0.13 / 0.42 , 0.21
Temperature Rise	80°C
Insulation Class	B (130°C)
Frequency	50 / 60Hz
Polarity	additive
Noise level	less than 40DB
Winding	Copper
Approvals	CE compliant UL listed CSA approved

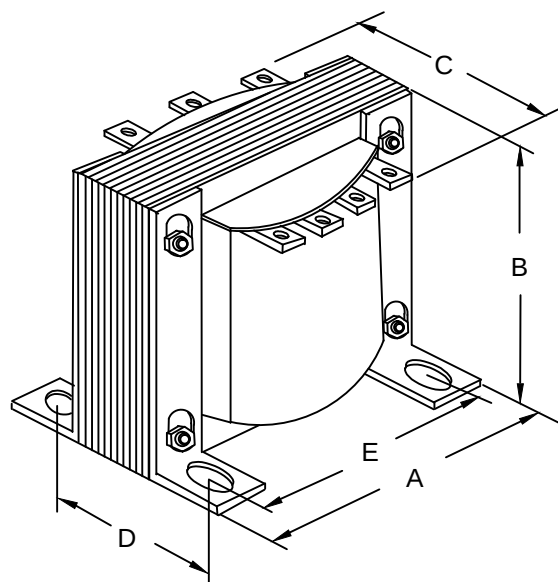

Primary Tabs

Pos.	H1	H2	H3				
Volts	0V	347	380				

CONNECTION DIAGRAM

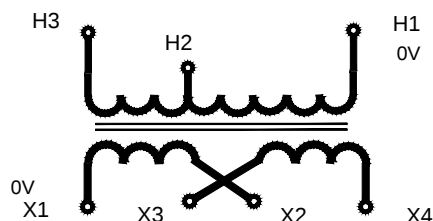

WIRING CONNECTION

PRIMARY :		
VOLTS 347 380	CONNECT LINES TO : H1-H2 H1-H3	
SECONDARY :		
VOLTS 120 240	INTERCONNECT: X1-X3 AND X2-X4 X2-X3	CONNECT LINES TO : X1-X4 X1-X4

DIMENSIONS INCHES / MM

VA	A	B	C	D	E	MOUNTING HOLES INCHES / MM	SHIP WEIGHT LBS / KG
50	3.00 76.2	2.50 63.5	3.00 76.2	2.25 57.2	2.50 63.5	0.21 x 0.625 5.3 x 15.9	2.25 1.0

Notes: