




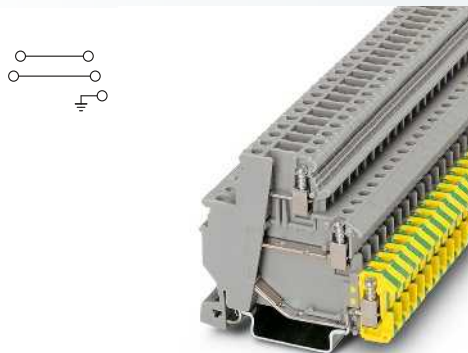

2.5 (4) mm², 26 A, three-level terminal block with PE foot

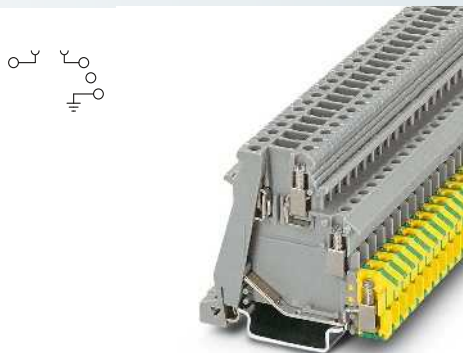

2.5 (4) mm², 16 A, three-conductor actuator terminal block with disconnect zone and PE foot

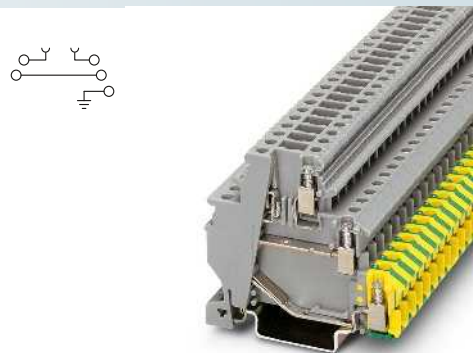

2.5 (4) mm², 26 A, three-level terminal block with disconnect zone and PE foot



Technical data			
Width	Length	Height NS 35/7,5	
6.2	62.5	54.5	
I _{max} [A]	U _{max} [V]	Max. Ø [mm ²]	AWG (UL)
26	250	0.2 - 4	30-14
IEC 60947-7-1 / IEC 60947-7-2			
IEC	UL	CSA	IEC/ EN 60079-7
250	300	300	-
24 / 2.5	15 / -	15 / -	-
2.5	-	-	-
24 - 12	30-14	28-14	-
IEC			
UL / CUL	CSA	IEC/ EN 60079-7	
-	-	-	-
Solid	Stranded	Ferrule without/with plastic sleeve	
0.2 - 4	0.2 - 2.5	0.25 - 2.5	0.25 - 2.5
0.2 - 1	0.2 - 1	0.25 - 1	-
-	-	-	0.5 - 1
4	2.5	-	-
8			
M3			
0.5 - 0.6			
PA			
V2			

Technical data			
Width	Length	Height NS 35/7,5	
6.2	61	54.5	
I _{max} [A]	U _{max} [V]	Max. Ø [mm ²]	AWG (UL)
16 ¹⁾	250 ¹⁾	0.2 - 4	30-14
IEC 60947-7-1 / IEC 60947-7-2			
IEC	UL	CSA	IEC/ EN 60079-7
250 ¹⁾	300	300	-
16 ¹⁾ / 1.5	15 / -	15 / -	-
2.5	-	-	-
24 - 12	30-14	28-14	-
IEC			
UL / CUL	CSA	IEC/ EN 60079-7	
-	-	-	-
Solid	Stranded	Ferrule without/with plastic sleeve	
0.2 - 4	0.2 - 2.5	0.25 - 2.5	0.25 - 2.5
0.2 - 1	0.2 - 1	0.25 - 1	-
-	-	-	0.5 - 1
4	2.5	-	-
8			
M3			
0.5 - 0.6			
PA			
V2			

Technical data			
Width	Length	Height NS 35/7,5	
6.2	63	54.5	
I _{max} [A]	U _{max} [V]	Max. Ø [mm ²]	AWG (UL)
26 ¹⁾	250 ¹⁾	0.2 - 4	30-14
IEC 60947-7-1 / IEC 60947-7-2			
IEC	UL	CSA	IEC/ EN 60079-7
250 ¹⁾	300	300	-
24 ¹⁾ / 2.5	15 / -	15 / -	-
2.5	-	-	-
24 - 12	30-14	28-14	-
IEC 60947-7-1			
IEC	UL / CUL	CSA	IEC/ EN 60079-7
-	-	-	-
Solid	Stranded	Ferrule without/with plastic sleeve	
0.2 - 4	0.2 - 2.5	0.25 - 2.5	0.25 - 2.5
0.2 - 1	0.2 - 1	0.25 - 1	-
-	-	-	0.5 - 1
4	2.5	-	-
8			
M3			
0.5 - 0.6			
PA			
V2			

Ordering data			
Type	I _{max}	Order No.	Pcs. / Pkt.
DOK 1,5-2D		2717139	50

Ordering data			
Type	I _{max}	Order No.	Pcs. / Pkt.
DOK 1,5-TG		2717113	50

Ordering data			
Type	I _{max}	Order No.	Pcs. / Pkt.
DOK 1,5-TG		3011054	50

Accessories			
EB 10- DIK GY	26 A	2715937	10
EB 10- DIK RD	26 A	2716774	10
EB 10- DIK BU	26 A	2716680	10
EB 80- DIK BU	26 A	2715940	1
EB 80- DIK RD	26 A	2715953	1
EB 80- DIK WH	26 A	2715788	1
ATP-DIKD 1,5		1413285	50
SF-SL 0,6X3,5-100 S-VDE		1212587	10
SK 6,2/3,8 (see Catalog 5)			
ZB 6 (see Catalog 5)			

Accessories			
EB 10- DIK GY	26 A	2715937	10
EB 10- DIK RD	26 A	2716774	10
EB 10- DIK BU	26 A	2716680	10
EB 80- DIK BU	26 A	2715940	1
EB 80- DIK RD	26 A	2715953	1
EB 80- DIK WH	26 A	2715788	1
ATP-DIK 1,5		1413272	50
SF-SL 0,6X3,5-100 S-VDE		1212587	10
SK 6,2/3,8 (see Catalog 5)			
ZB 6 (see Catalog 5)			

Accessories			
EB 10- DIK GY	26 A	2715937	10
EB 10- DIK RD	26 A	2716774	10
EB 10- DIK BU	26 A	2716680	10
EB 80- DIK BU	26 A	2715940	1
EB 80- DIK RD	26 A	2715953	1
EB 80- DIK WH	26 A	2715788	1
ATP-DIKD 1,5		1413285	50
SF-SL 0,6X3,5-100 S-VDE		1212587	10
SK 6,2/3,8 (see Catalog 5)			
ZB 6 (see Catalog 5)			