
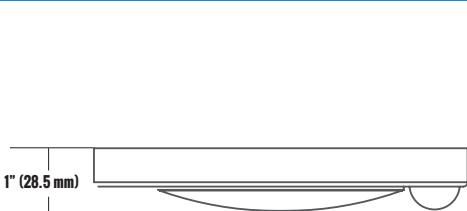


PRODUCT CODE: CL106P-110WM-PF5C9N
6 INCH APERTURE CLOSET LIGHT SURFACE MOUNT 5CCT


PRODUCT DESCRIPTION

The new Etlin-Daniels Low profile LED Closet Light CL106P-110WM-PF5C9N offers compact design, enhanced energy savings, glare free illumination, all with a built-in PIR Sensor. The aluminum housing will dissipate what little heat the diode array produces and the easy-to-remove frosted polycarbonate lens allows for simply, quick installation.

This new generation is equipped with a 5CCT switch allowing for a choice between 5 available color temperatures and is now 90CRI for enhanced color definition. The CL106P comes with multiple keyless slot locations to attach to the j-box, providing optimal Sensor positioning for its auto on/off function. Once the space is vacated, the sensor will automatically shut off the fixture in 30 seconds.

The new generation CL106P is the perfect solution to illuminate closets, garbage rooms, small storage rooms, washrooms, basements, residential garages - anywhere a lighting fixture may be left on when the space is vacated.

FEATURES

- LED Indoor Light Source
- Surface Mount low profile 1" deep housing // 6" diameter
- Durable aluminum body with frosted polycarbonate lens.
- 120V
- 90CRI
- 5CCT - 2700K/3000K/3500K/4000K/5000K
- Wet location rated
- Keyless slot mounting to j-box
- PIR Sensor built-in - 30 seconds to off when space is vacated
- 5 year warranty
- L70 - 50,000 hours
- Energy Star Certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	CRI	VOLTAGE	POWER FREQ.
2700K = 55.4LM/W	2700K = 554.8 LM	CHANGEABLE: 2700K / 3000K	>90CRI	120VAC	60HZ
3000K = 58.8LM/W	3000K = 588.9 LM	3500K = 626.4 LM			
3500K = 62.6LM/W	4000K = 635.1 LM	4000K = 635.1 LM			
4000K = 63.5LM/W	5000K = 611 LM	5000K = 611 LM			
5000K = 61.1LM/W					

PRODUCT SPECIFICATIONS

WATTAGE	Fixture Material	LIFE SPAN	PRODUCT DIMENSIONS	CARTON SIZE	Image
10W	PC PLASTIC / METAL	>50,000 HOURS	6.7 X 6.7 X 1 INCHES (112.5 X 112.5 X 28.5 MM)	7.1 X 7.1 X 1.37 INCHES (182 X 182 X 35 MM)	
ADDITIONAL INFORMATION			INSTALLATION METHOD	Fixture Color/Diffuser	Control Type
			CEILING MOUNT	WHITE MATTE / FROSTED	NON-DIMMABLE PIR SENSOR



PRODUCT CODE: CL106P-110WM-PF5C9N

6 INCH APERTURE CLOSET LIGHT SURFACE MOUNT 5CCT



CERTIFICATIONS



CAN ICES-005 (B) / NMB-005 (B)

CONTROL



ORDERING INFORMATION - CL SERIES

SERIES	SIZE	CONTROL TYPE	VOLTAGE	WATTAGE	FINISH	DIFFUSER	COLOR TEMPERATURE	CRI	DIMMABLE
E.G. CL10	6	P	1	10	WM	PF	5C	9	N
CL10 - CLOSET LIGHT	6 - 6 INCH	P = PIR SENSOR	1-120V	10-10W	WH-WHITE MATTE	PF - PC FROSTED	C = 5CCT	90 = CRI >90	N = NO
							COLOR CHANGEABLE:		
							2700K/3000K/3500K		
							4000K/5000K		

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com