

# 16342




Color :  Brown

UPC Code : 078477788240

Country Of Origin : Mexico

NEMA :  5-20R

## Available Colors :

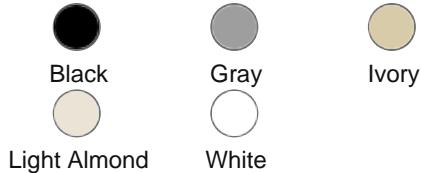

Light Almond

White

20 Amp Decora Plus Duplex Receptacle/Outlet, Industrial Grade, Self-Grounding

Decora Plus Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Brown

Leviton's line of Heavy-Duty Specification Grade receptacles are designed and manufactured to withstand the most demanding environments. Available in a wide variety of configurations, including isolated ground, tamper-resistant, etc., these Commercial Grade devices are the electrical contractor's choice for use in hotels, schools, hospitals and commercial office buildings.

## Technical Information

[AC Horsepower Ratings](#)

[Electrical Specifications](#)

**At Rated Voltage :** 1 HP

**Amperage :** 20 A

**Current Limiting :** Full Rated Current

**Dielectric Voltage :**  
Withstands 3000V per UL498

**Grounding :** Self-Grounding

**Pole :** 2

**Temperature Rise :** Max 30C temperature rise at full rated current

**Voltage :** 125 VAC

**Wire :** 3

## Environmental Specifications

## Material Specifications

**Flammability :** Rated V-2 per UL 94

**Body Material :** PBT Polyester Blend

**Operating Temperature :** -40° C to 60°C

**Clamp Nuts :** Steel

**Color :** Brown

**Face Material :** PBT Polyester Blend

**Ground Clips :** Brass

**Grounding Screw :** #8 Hex Head, Triple-Drive Brass

**Line Contacts :** .030" Brass

**Strap Material :** Steel (Galvanized G60)

**Terminal Screws :** #8 Triple Drive Brass

#### Mechanical Specifications

**Product ID :** Ratings are permanently marked on device

**Screw Terminal Torque :** 14-18 in-lbs

**Terminal Accom. :** 14-10 AWG

**Terminal ID :** Brass-Hot, Green-Ground, Silver-Neutral

**Termination :** Side Wire

#### Product Features

**Brand :** Decora Plus

**Color :** Brown

**Device Type :** Duplex Receptacle Outlet

**Feature 4 :** Smooth Face

**Grade :** Commercial Specification Grade

**Grounding :** Self-Grounding

**NEMA :** 5-20R

#### Standards and Certifications

**ANSI :** C-73

**NEMA :** WD-1 & WD-6

**Warranty :** 10-Year Limited

#### **Patents \***

CA2483480

MX257790

MX321216

US6743029

US8684771

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

#### **SPECIFICATION SUBMITTAL**

<b>JOB NAME:</b> <input type="text"/>	<b>CATALOG NUMBERS:</b> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>		
<b>JOB NUMBER:</b> <input type="text"/>			

#### **Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

#### **Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

#### **Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/international/contacts](http://www.leviton.com/international/contacts)

**© 2024 Leviton Manufacturing Co., Inc.**