


MGB-L0H-ARA-R-105779 (Order no. 105779)

Interlocking set MGB-L0H-ARA..., with 2 pushbuttons, emergency stop

- ▶ Interlocking (without guard locking)
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 2 pushbuttons (illuminated, ye, wh)
- ▶ With cable entry
- ▶ Unicode

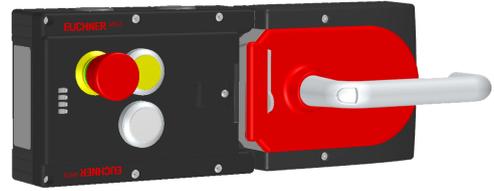

Guard locking type

MGB- L0... The bolt tongue in the handle module is moved into and out of the interlocking module by actuating the door handle. The door arm is not locked in the locked position.

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OI Diagnostics; there is a fault


Emergency stop device

S1 2 positively driven contacts and 1 NO contact (e.g. monitoring contact), emergency stop with turn-to-reset, not illuminated


Pushbuttons

- S2 1 NO contact, yellow, illuminated
- S3 1 NO contact, white, illuminated

Dimensional drawings

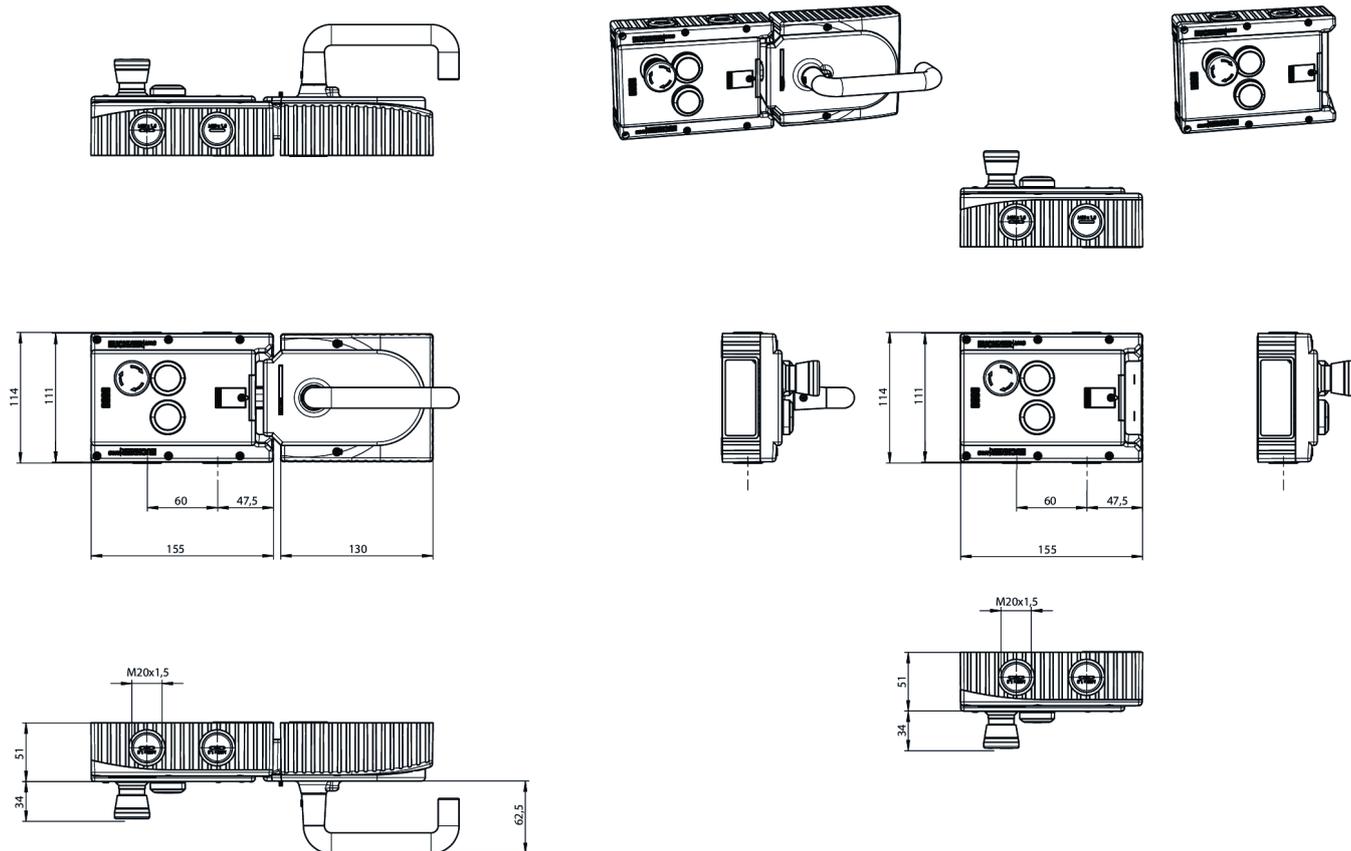

Connection examples

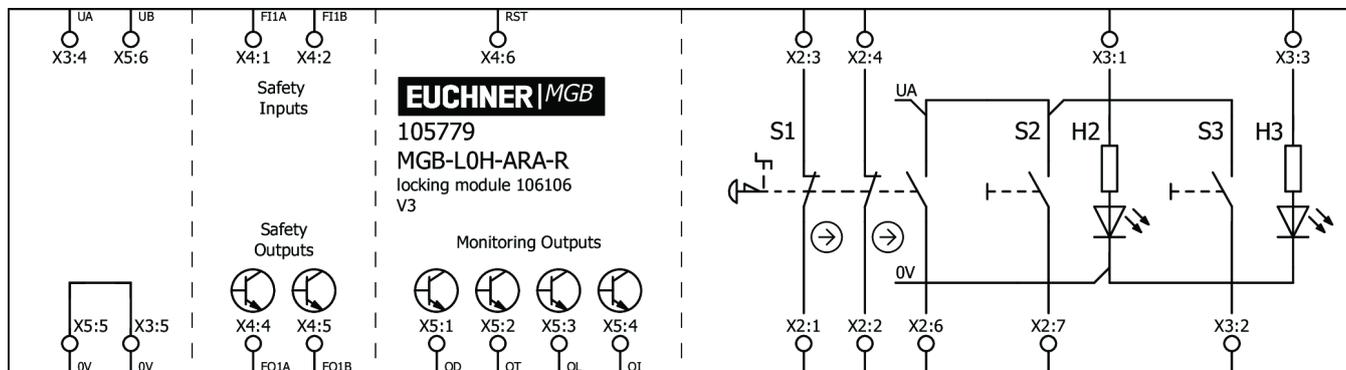

Components



100464

MGB-H-AA1A1-R-100464

Handle module MGB-H-...

- ▶ Intelligent bolt tongue
- ▶ Lockout mechanism
- ▶ Door handle



106106

MGB-L0-ARA-AB8A1-M-106106

Interlocking module MGB-L0-ARA..., with 2 pushbuttons, emergency stop

- ▶ Interlocking (without guard locking)
- ▶ Can be connected in series with other AR devices (CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 2 pushbuttons (illuminated, ye, wh)
- ▶ With cable entry
- ▶ Unicode