

Locking sets MGB-L1-... (guard locking by spring force) with 2 controls or indicators

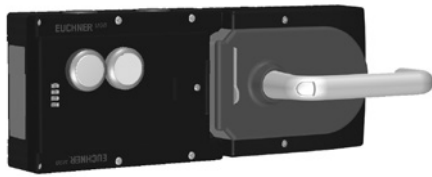


Cat.
4

PLe



UL
LISTED



- ▶ Can be connected in series with other AR devices (e.g. CES-AR, CET-AR and CTP-AR)
- ▶ With cable entry or plug connector
- ▶ Integrated controls and indicators

Details

Emergency stop with monitoring contact

Additional normally open contact in the emergency stop, e.g. as monitoring contact for the control system.

Key-operated rotary switch

- ▶ **Form L**, 90° angle of rotation with 2 positions. The key latches in both positions and can be removed in both positions. Devices with key-operated switch form L have degree of protection IP 54.
- ▶ **Form V**, 40° angle of rotation with 2 positions. The key latches in position 0 and can be removed in position 0.

Lens set

The color of the pushbuttons can be selected using the lens set 120344 included.






Adhesive labels

Devices with adhesive labels have pre-formed recesses. The adhesive labels enclosed (standard size 12.5 x 27 mm) can be affixed in these recesses.

Further information

- ▶ Dimension drawings see p. 51
- ▶ Technical data see p. 50
- ▶ Accessories and spare parts see p. 63
- ▶ www.euchner.com








Ordering table

Modules in the set										Ordering data, set
Locking module						Handle module Order no. separate module	Escape release Order no. separate module	Door hinge (factory setting)	 Order no./item	
Version/configuration scheme Order no. separate module	S1 H1	S2 H2	S3 H3	S4 H4	Wiring diagram					
   IP 54  IP 54		 *)	—	—	A	100464	100465	Right	121131 MGB-L1HE-ARA-R-121131	
	 *)	 *)	—	—	B	100464	— 100465	Right	121051 MGB-L1H-ARA-R-121051 121052 MGB-L1HE-ARA-R-121052	
	 Form L, 90°	 *)	—	—	C	100464	—	Right	124098 MGB-L1H-ARA-R-124098	
							106619		Left	124099 MGB-L1H-ARA-L-124099

* The color can be selected using the lens set included.

(Continued on next page)

Ordering table (continued)

Modules in the set										Ordering data, set
Locking module						Handle module Order no. separate module	Escape release Order no. separate module	Door hinge (factory setting)		Order no./item
Version/configuration scheme Order no. separate module	S1 H1	S2 H2	S3 H3	S4 H4	Wiring diagram					
 119806 IP 54	 wh	 Form V 40°	—	—	 D	114655	100465	Right	119807 MGB-L1HE-ARA-R-119807	
 119808 IP 54						114656		Left	119809 MGB-L1HE-ARA-L-119809	
 121060	—	 *)	 *)	—	 E	100464	—	Right	121061 MGB-L1H-ARA-R-121061	
							100465		121062 MGB-L1HE-ARA-R-121062	
							 121086 Incl. adhesive labels		—	121087 MGB-L1HE-ARA-R-121087 (with lens set 120378)
									—	121170 MGB-L1H-ARA-R-121170
 121088 Incl. adhesive labels	—	*)	*)	—	E	106619	—	Left	121171 MGB-L1H-ARA-L-121171	
							100465		121089 MGB-L1HE-ARA-L-121089 (with lens set 120378)	
 121067							—		121069 MGB-L1HE-ARA-L-121069	
							—		121068 MGB-L1H-ARA-R-121068	

* The color can be selected using the lens set included.

(Continued on next page)