

## RIEGEL TP-C (Order no. 084432)

### Bolt for safety switches GP and TP

- ▶ Bolt for safety switches GP and TP...A
- ▶ Steel bolt
- ▶ For doors hinged on the left
- ▶ Suitable for a door gap of approx. 15 mm



### Scope of delivery

- ▶ Bolt parts
- ▶ Actuator

### To be ordered separately:

- ▶ Safety switch


### Door types and door hinges

Suitable for hinged and sliding doors. Suitable for doors hinged on the left. With door stop, door cannot be opened inwards.

### Integrated lockout bar

With the aid of the integrated lockout bar, the bolt can be secured in the open position, e.g. using padlocks. It is possible to prevent people from being locked in the danger area unintentionally.

## Dimensional drawings

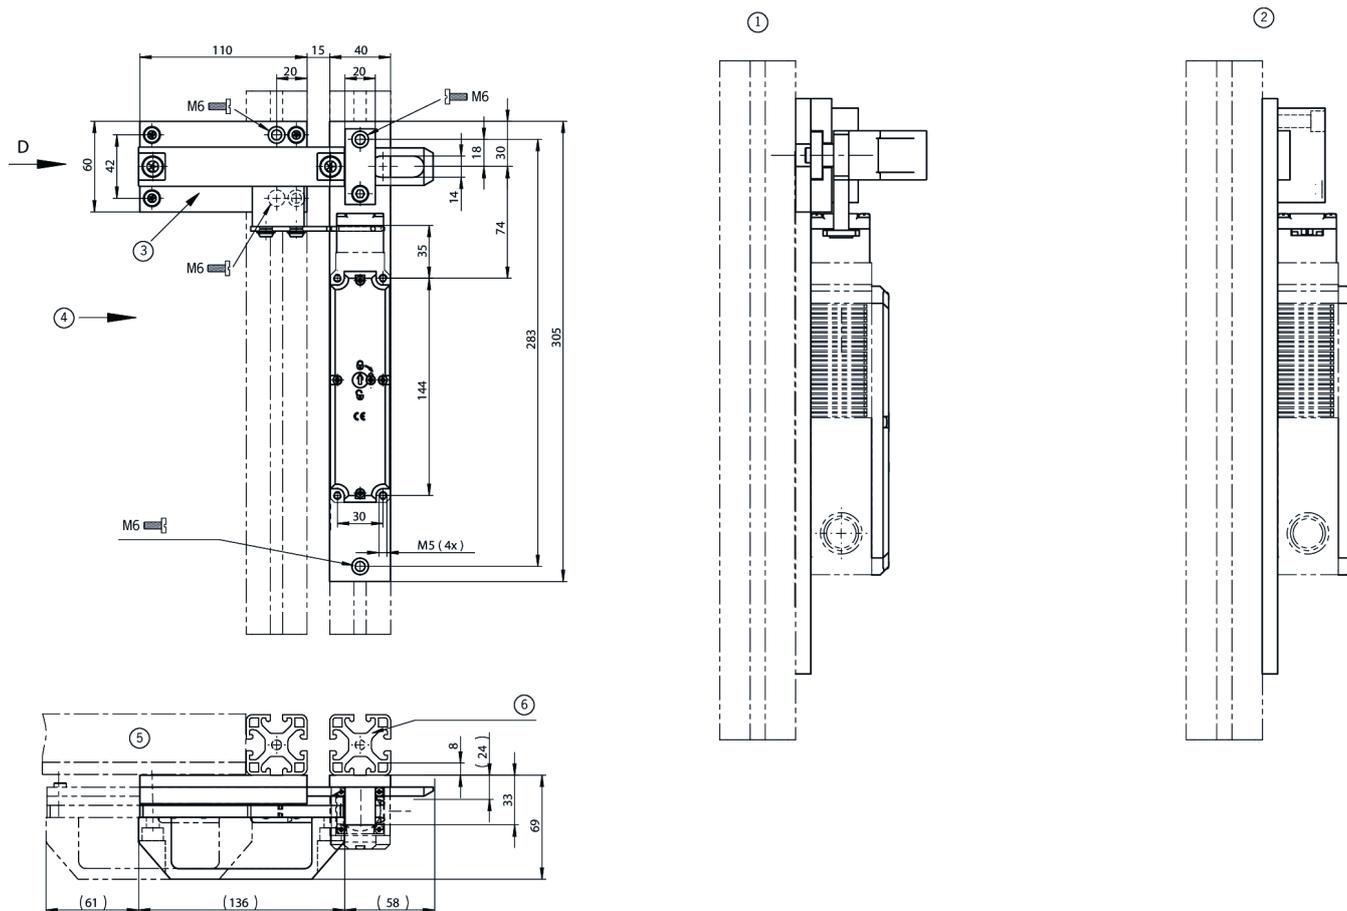

1 View D

2 View B

3 Attention! Bolt is not allowed to be used in conjunction with an escape release!

4 Safety switch TP approach direction C

5 Door hinged on the left

6 Safety guard frame (40x40)

## Technical data

### Mechanical values and environment

Approach direction	C
Number of safety switches that can be mounted	1
Escape release	None
Storage temperature	-25 ... 70 °C
Material	
Base plate	Galvanized steel
Switch bracket	Steel powder-coated
Guide strips	Plastic
Handle	Plastic

### Miscellaneous

Detent mechanism	None
------------------	------