

MGB-E-A-100465 (Order no. 100465)

Escape release MGB-E-A...

- ▶ Escape release from the danger zone
- ▶ Signal red door handle
- ▶ Designed for door profiles up to 40 mm
- ▶ Extended actuation axis for thicker doors (available optionally)




Escape release

The safety system MGB/MGB2 can be equipped with an escape release module. The escape release enables people shut in to open the locked door from the danger zone. It is only necessary to actuate the door handle. The actuating direction automatically adapts to the actuating direction of the handle module and does not need to be changed. The actuation axis supplied is suitable for profiles up to 40 mm.

Extended actuation axis

Optionally, for thicker doors or profiles >40 mm, a 250 mm long actuation axis 106761 (instead of 107 mm) can be ordered. The axis can be shortened to the required dimension.


Dimensional drawings

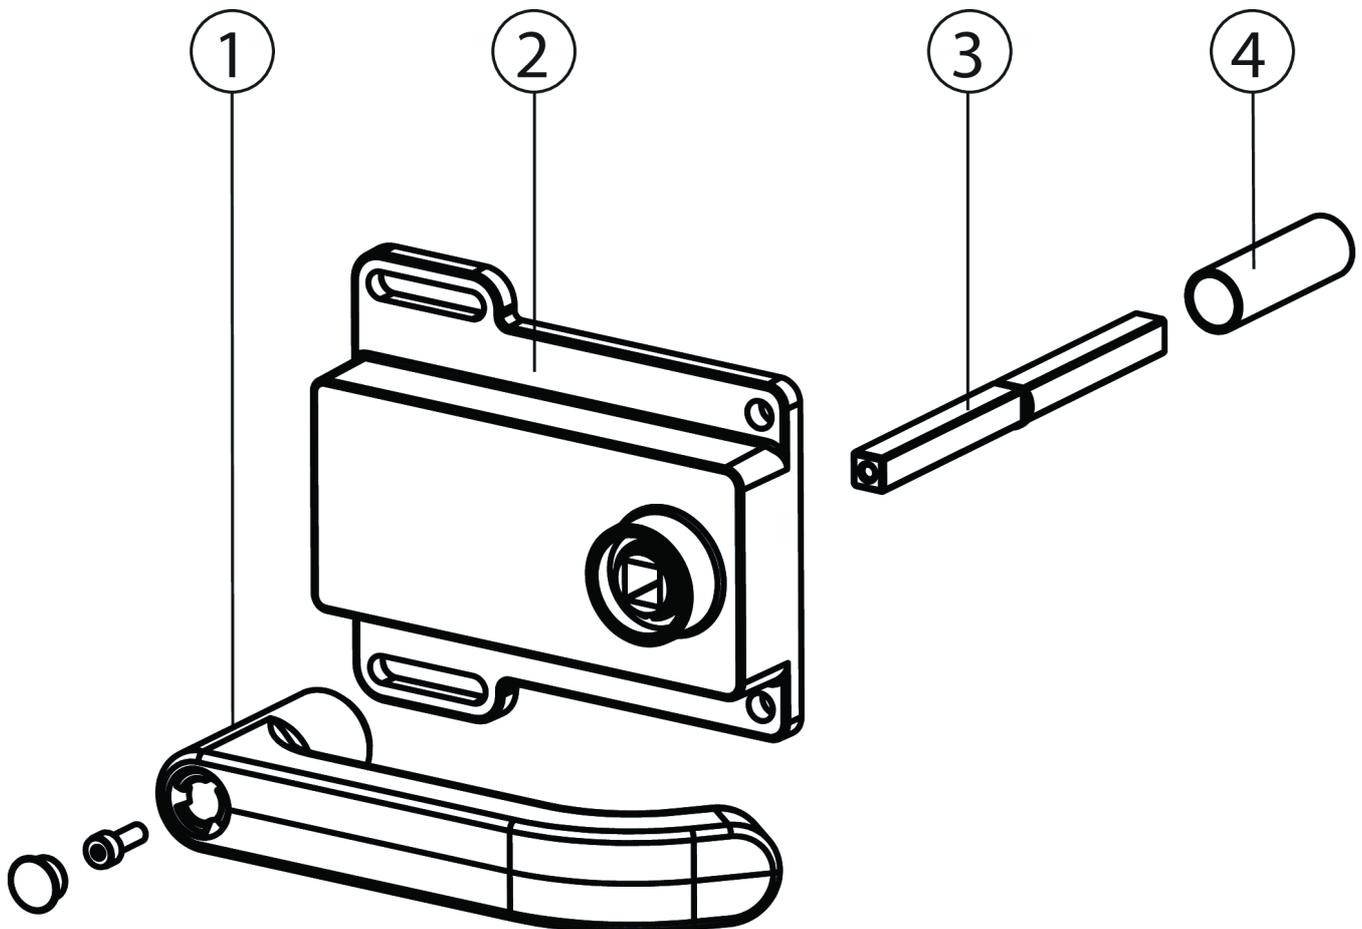

1 Door handle

- 2 Housing
- 3 Actuation axis 8 x 8 mm
- 4 Protective sleeve

Dimensional drawings

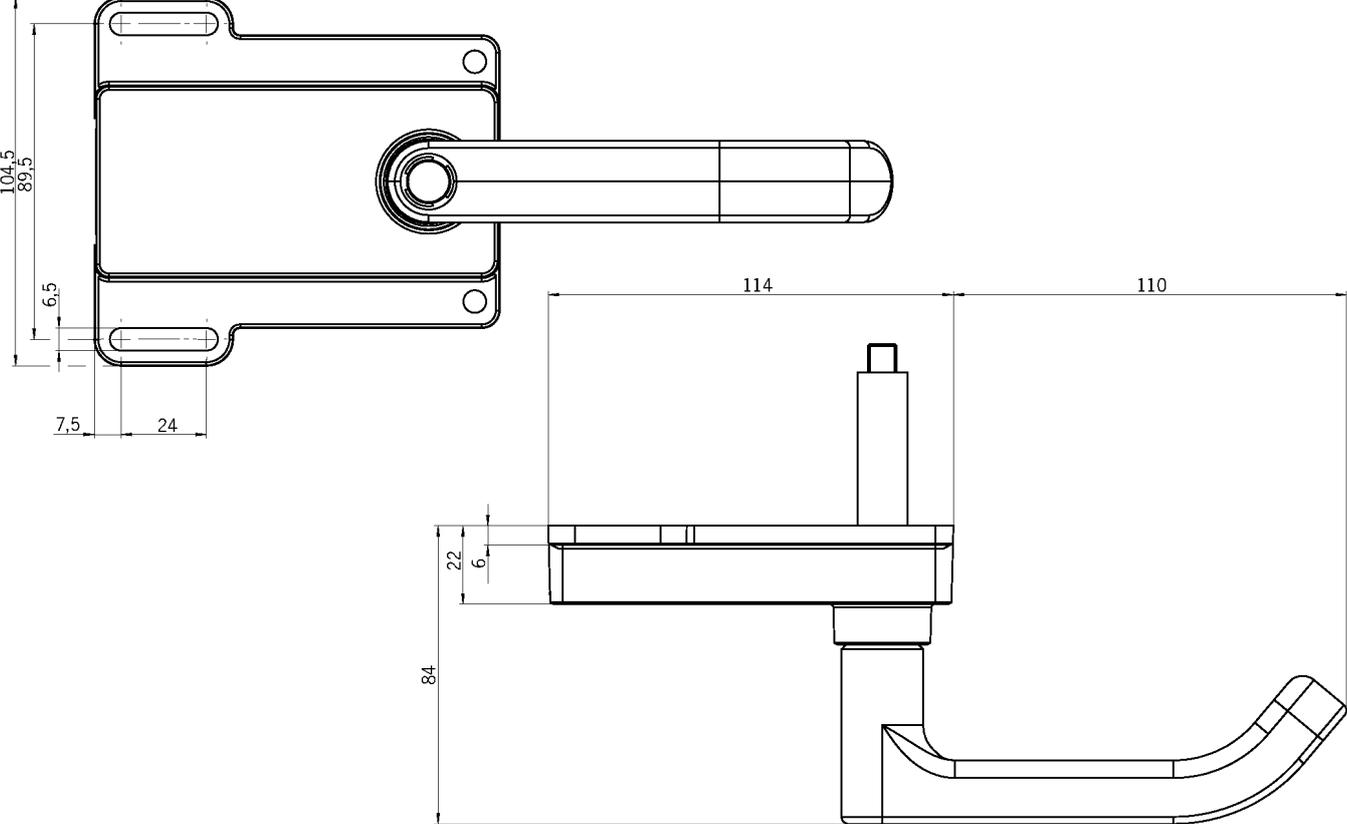

Technical data

Approvals



Mechanical values and environment

Installation orientation	any
--------------------------	-----

Storage temperature	-30 ... 70 °C
---------------------	---------------

Mechanical life	1 x 10 ⁶
-----------------	---------------------

Ambient temperature	-30 ... 55 °C
---------------------	---------------

Material	
----------	--

Housing	Die-cast zinc/stainless steel, powder-coated
---------	--

Miscellaneous

Product version number	V2.0.0
------------------------	--------