


35POL/15M/METALLAUSFUEHRUNG (Order no. 092657)

Extension cable 35-core, straight

- ▶ Extension cable
- ▶ Flange plug connector with socket contacts, 35-pin
- ▶ Plug connector with male contacts, 35-pin
- ▶ Bayonet plug lock
- ▶ PUR cable
- ▶ Cable length 15 m, straight



Dimensional drawings

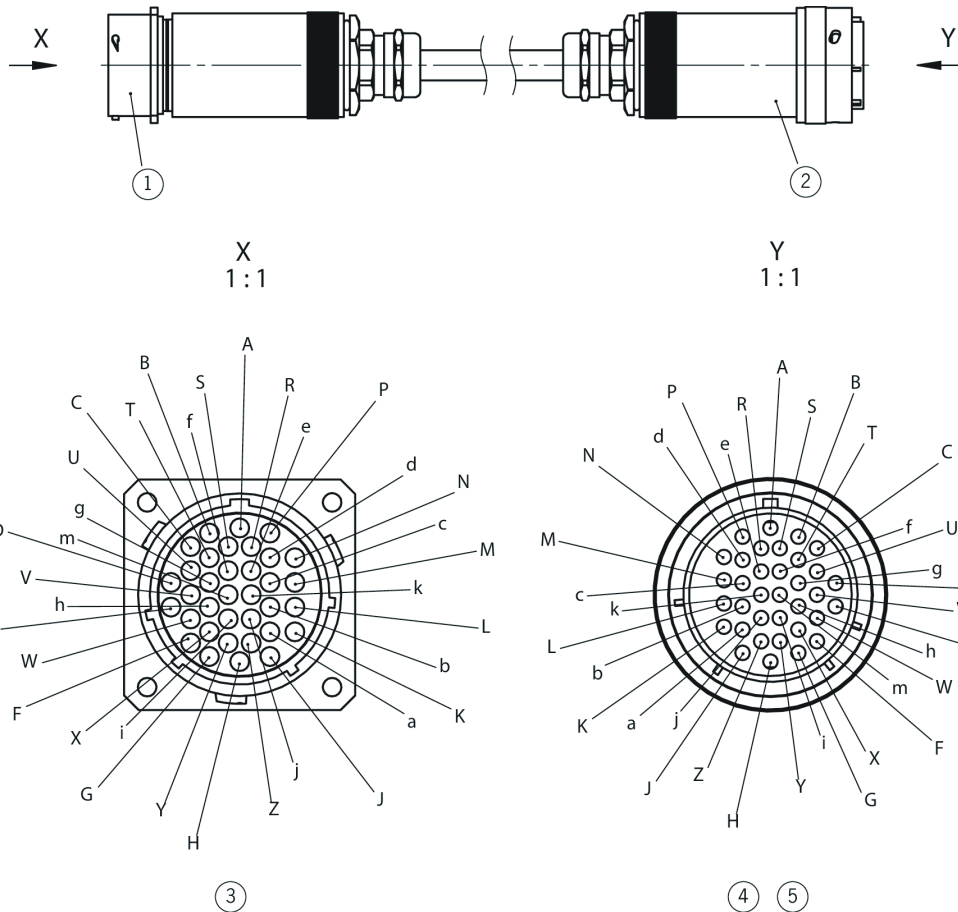

Steckerbelegung:			Steckerbelegung:			Steckerbelegung:		
⑥			⑥			⑥		
Kontakt Pin	Querschnitt mm ²	Adernfarbe	Kontakt Pin	Querschnitt mm ²	Adernfarbe	Kontakt Pin	Querschnitt mm ²	Adernfarbe
⑦	⑧	⑨	⑦	⑧	⑨	⑦	⑧	⑨
A	0,14	BNBU	N	0,14	BNGN	b	0,14	BKWH
B	0,14	BUWH	P	0,34	GN	c	0,14	BKBN
C	0,14	GNWH	R	0,34	YEWH	d	0,14	GNGY
D	0,14	YEWH	S	0,14	BNYE	e	0,14	YEGY
E	0,14	GYWH	T	0,14	BNGY	f	0,14	GPNK
F	0,14	WKPK	U	0,14	BNPK	g	0,14	YEPK
G	0,14	BK	V	0,34	WH	h	0,14	GNBU
H	0,14	VT	W	0,34	BN	i	0,14	YEBU
J	0,14	GYPK	X	0,34	RD	j	0,14	RDGN
K	0,34	GY	Y	0,34	BU	k	0,14	RDYE
L	0,34	PK	Z	0,14	RDWH	m	0,14	BKGN
M	0,14	RDBU	a	0,14	BNRD			

1 Flange plug connector with socket contacts

2 Plug connector with male contacts

3 Pin assignment 1:1, inner screens not connected, outer screen connected to plug housing

4 Cable length: 15 m

5 Conductors: 4 x 0.34 mm², 4 x 0.34 mm², 27 x 0.14 mm²; plug connector: 35 pins, version: metal

6 Connector assignment:

7 Contact pin

8 Cross-section mm²

9 Conductor coloring