

## MGB2-L1HB-PN-U-S3-DA-L-156389 (Order no. 156389)

### Complete set MGB2-L1...-PN (2 pushbuttons, emergency stop, closed-circuit current principle, door hinge on left)

- ▶ Guard locking with guard lock monitoring
- ▶ Illuminated emergency stop according to ISO 13850
- ▶ 2 illuminated pushbuttons
- ▶ 3 slide-in labels
- ▶ Connection via plug connector RJ45, AIDA compliant
- ▶ Integrated switch
- ▶ Adjustable door hinge; factory setting: left
- ▶ Unicode



### Guard locking type

MGB2- Guard locking by spring force. Release by applying voltage to the guard locking solenoid.  
 L1... (closed-circuit current principle)

### PROFINET connection

Plug connector RJ45 (push-pull plug according to IEC 61076-3-117, variant 14)

### PROFINET switch

Linear topology network structure due to integrated switch (supports MRP).

### Lens set


The color of the pushbuttons can be selected using the lens set 120344 included (5 colors).

### Slide-in labels


The user can produce custom labeling using the enclosed slide-in labels. (3 pcs., blank)

Dimensional drawings

...-R-...

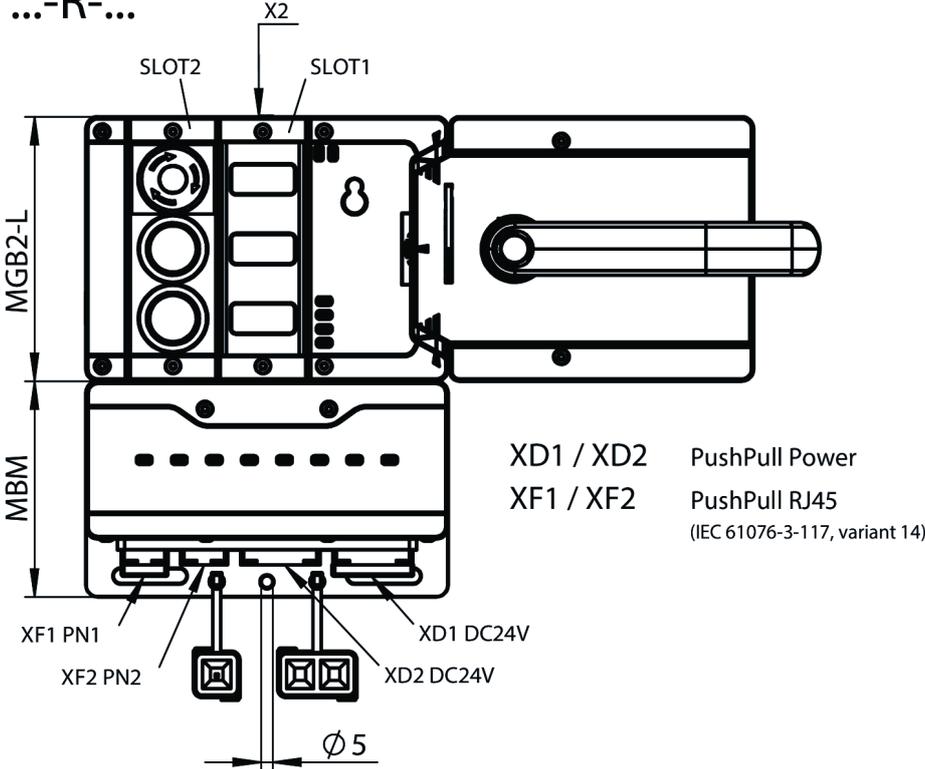

XD1 / XD2 PushPull Power  
XF1 / XF2 PushPull RJ45  
(IEC 61076-3-117, variant 14)

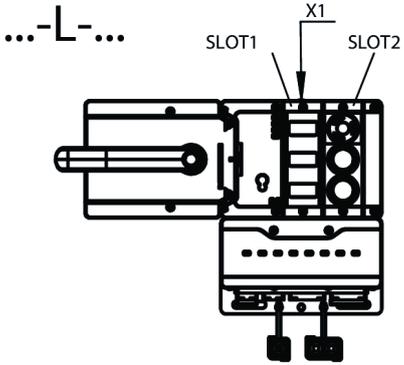

**Dimensional drawings**

