


MGB-L1-ARA-AM8A1-M-R-121226 (Order no. 121226)

Locking module MGB-L1-ARA... (guard locking by spring force) with 1 pushbutton, key-operated rotary switch, emergency stop

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 1 pushbuttons (illuminated)
- ▶ With lens set, 6 pcs.
- ▶ Key-operated rotary switch (form V, 40°)
- ▶ With cable entry
- ▶ Unicode
- ▶ Degree of protection IP54

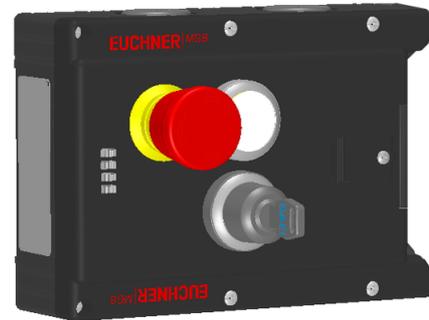

Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force
L1... (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

Emergency stop device

S1 2 positively driven contacts and 1 NO contact (e.g. monitoring contact), emergency stop with turn-to-reset, not illuminated

Pushbuttons

S2 1 NO contact, illuminated

Lens set

The color of the pushbuttons can be selected using the color cover set included (5 colors). Item no.: 120344 (see Accessories)

Key-operated rotary switch

S3 Key-operated switch with 2 positions (form V, 40°). The switch latches in position 0. The key can be pulled out in this position.