


HBA-091638 (Order no. 091638)

Hand-held pendant station HBA, EMERGENCY STOP device, enabling switch, membrane pushbuttons, handwheel, selector switch

- ▶ Handwheel 100 pulses, mechanical detent mechanism
- ▶ 1 enabling switch, 3-stage, 2 NO contacts each
- ▶ Tamper-proof EMERGENCY STOP device according to EN ISO 13850, dual-channel
- ▶ 1 selector switch with 8 positions (X, Y, Z, 1, 2, 3, 4, 5)
- ▶ 1 selector switch with 5 positions (0, 1, 10, 100, 1000)
- ▶ 2 membrane pushbuttons, 1 NO contact each



Dimensional drawings

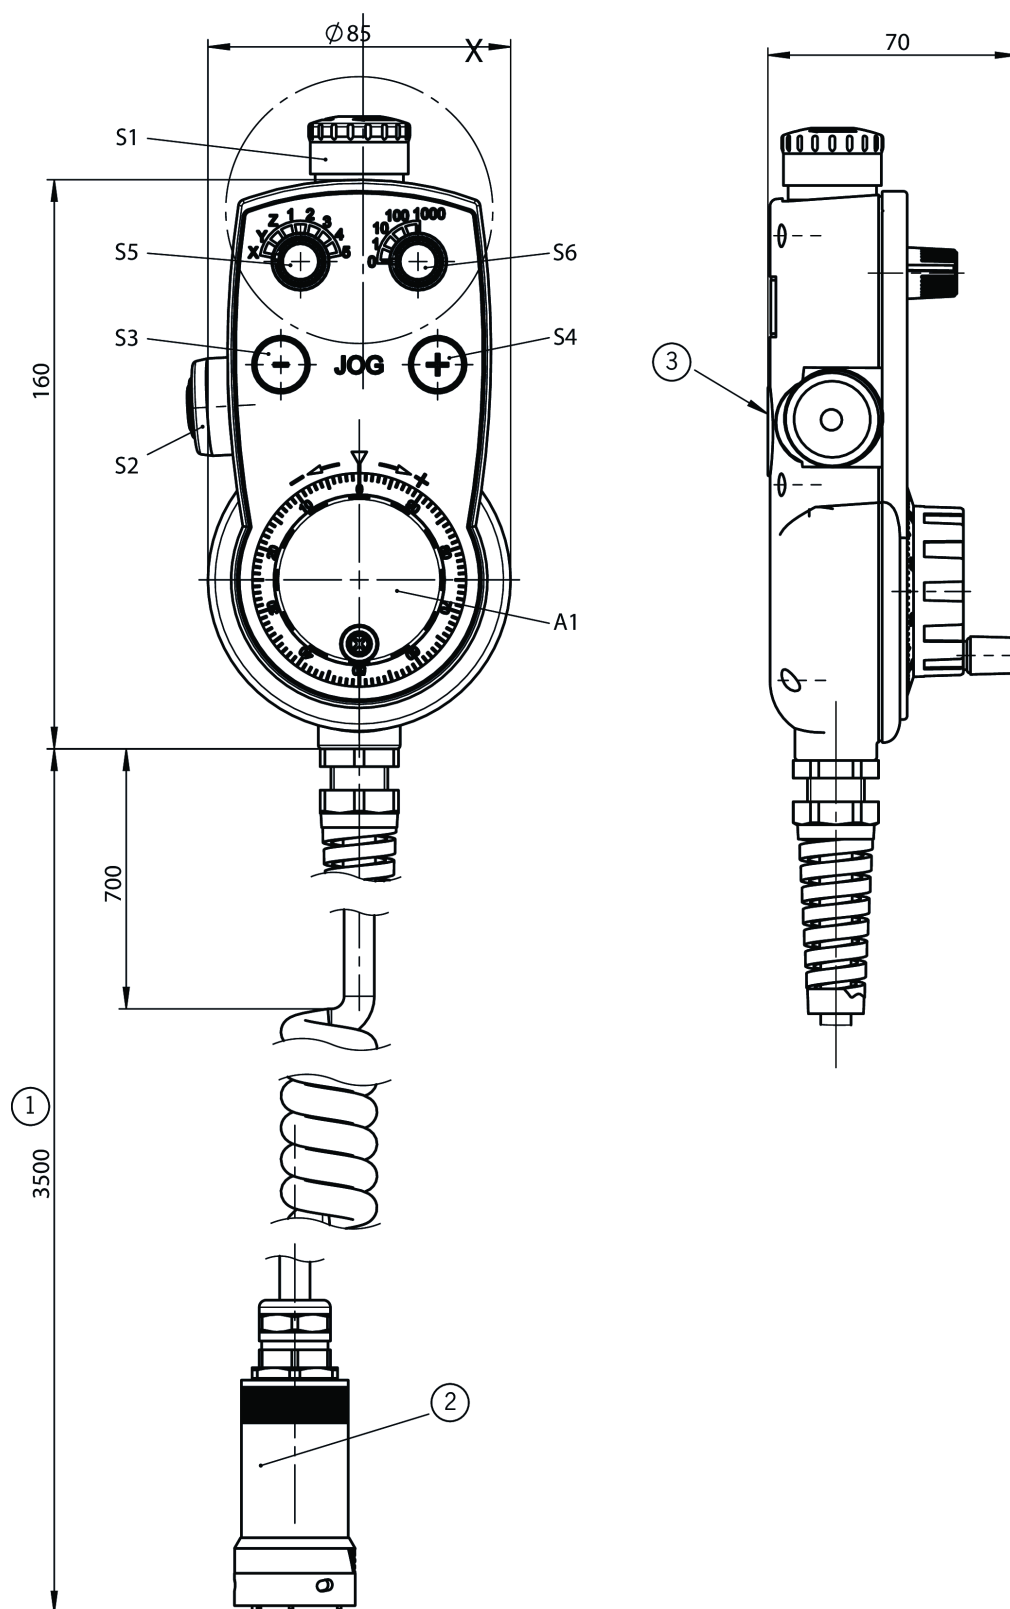

1 Cable length stretched

2 Plug connector 23-pin made of metal

3 Mounting magnet

Connection examples

A1:
Handrad 100 Impulse
handwheel 100 pulses
Ausgang: 5V
output: 5V
G05

S1:
NOT-AUS
emergency-stop

S2:
ZSX
Zustimmungsschalter links
enabling switch left

S3: -
Taste links
push button left


S4: +
Taste rechts
push button right

S5:
Stufenschalter links
selector switch left
8-stellig
8 positions

S6:
Stufenschalter rechts
selector switch right
5-stellig
5 positions

S5	CBA	
1	000	X
2	001	Y
3	011	Z
4	010	1
5	110	2
6	111	3
7	101	4
8	100	5

S6	CBA	
1	000	0
2	001	1
3	011	10
4	010	100
5	110	1000

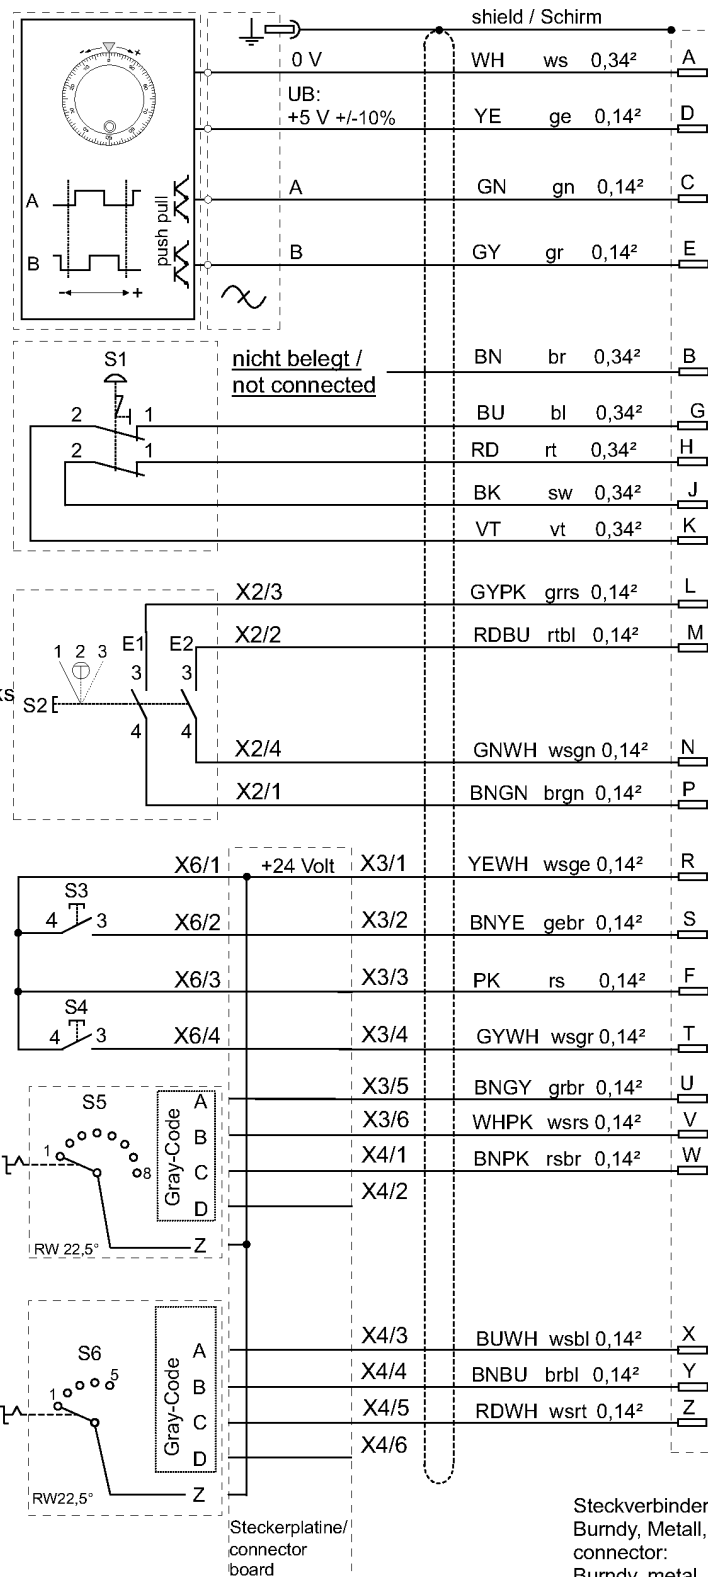

Steckverbinder:
Bumdy, Metall, 23 polig
connector:
Bumdy, metal, 23 pin