


MGB-L2CB-PN-R-106053 (Order no. 106053)

Evaluation module with control and bus module MGB-...-PN with 11 controls and indicators, push-pull plug, RC12

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850
- ▶ 8 illuminated pushbuttons
- ▶ Operating mode selector
- ▶ 1 indicator
- ▶ including adhesive labels
- ▶ Push-pull plug
- ▶ including terminal plug for enabling switch (RC12, 12-pin)
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ Multicode

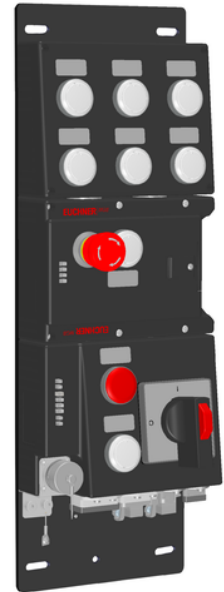

Profinet connection

Connection via push-pull plugs according to IEC 61076-3-117


Profinet RT switch

Point-to-point topology network structure due to integrated RT switch.

Flexible use as interlocking or guard locking

By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

Dimensional drawings

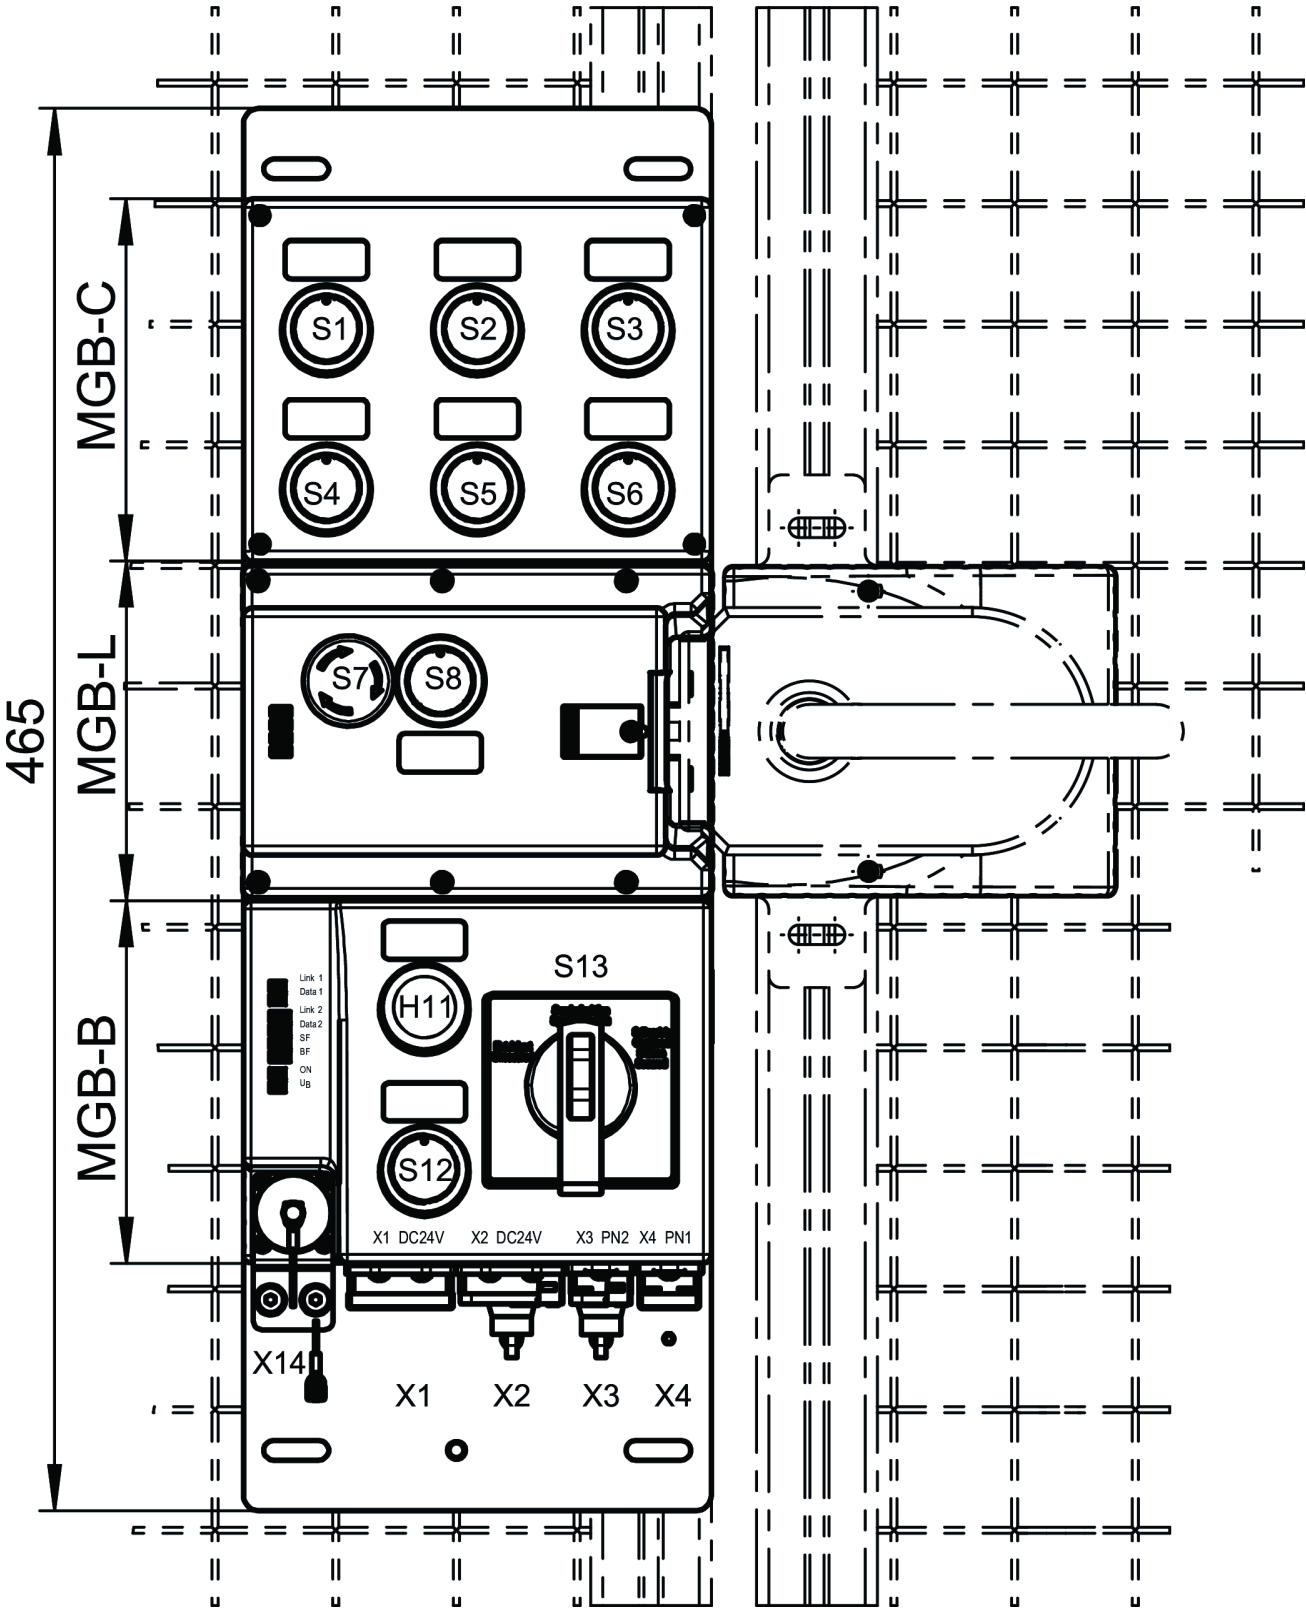

Technical data

Approvals



Workspace

Secured switch-off distance s_{ar}

Only with sliding door 20 mm

(Only applies for use on sliding doors with deactivated guard lock monitoring)

Operating and display elements

Occupancy diagram

- L2
- B2
- C3

Item	Color	Extras	Note slide-in label	Version	Switching element	Slide-in label	Number	Designation1	LED
1	white			Illuminated pushbutton	1NO				
11	red			Signal indicator					
12	white			Illuminated pushbutton	1NO				
13				Operating mode selector	Code 2 of 3	Entsichert / Unsecured ; Sonderfunktion / Special function ; S-Bereich Gesichert / S-Zone Secured			
2	white			Illuminated pushbutton	1NO				
3	white			Illuminated pushbutton	1NO				