

OCT Contemporary Convector



White

Metallic Charcoal



1



Features

Color

- Standard: white, metallic charcoal.
- Optional (upcharge applicable): almond, metallic silver, bronze, aluminum, semi-gloss black, sand.
- Custom colors available upon request.

Finish

- Standard: epoxy/polyester powder paint.

Voltage

- 240/208V, 50/60 Hz, 1-phase.

Construction

- 20-gauge steel.
- Warm air outlet that directs the air to the centre of the room.
- Bar grilles prevent insertion of foreign objects; smooth-finish paint is washable.
- High-limit temperature control with automatic reset.

Heating element

- 2 quiet aluminum monoblock elements.

Watt density

- 700W/ft. (2320W/m).

Control

- Built-in non programmable electronic thermostat(-THO models). 1

Installation

- 4 in. (102 mm) minimum clearance to floor and from an adjacent wall.
- Quick surface-mounted installation, with the included wall mounting bracket.

Warranty

- 5-year warranty against defects.
- (The warranty is valid only if the heater is controlled by a proportional pulsing electronic thermostat with a cycle of 15 seconds maximum.)


Application

- Kitchen, living room, family room, bedroom, basement.


Models

Watts	Volts	Product # Without Thermostat ¹	Product # Non Programmable Integrated Thermostat	Length		Weight	
				in.	mm	lb	kg
500/375	240/208	OCT0500	OCT0500-THO	18	457	13	6
750/563	240/208	OCT0750	OCT0750-THO	20 3/4	527.5	15.5	7
1000/750	240/208	OCT1000	OCT1000-THO	23 9/16	598	16.7	7.6
1500/1125	240/208	OCT1500	OCT1500-THO	29 1/16	739	20	9.1
2000/1500	240/208	OCT2000	OCT2000-THO	34 5/8	880	24	10.9

¹ The OCT warranty is valid only if the heater is controlled by a proportional electronic pulsing line thermostat with a cycle of 15 seconds maximum.
Add "BL" for white, "CM" for metallic charcoal. Upcharge available for optional colors shown in the color chart section.




Front View



Side View



Top View

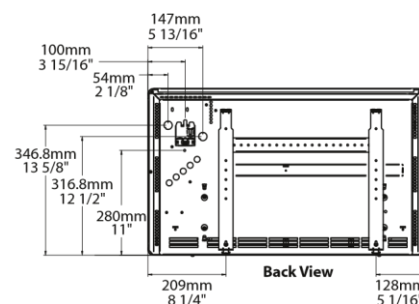

Back View

